

Lightology

lightology.com
866-954-4489
06-30-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG651300**
 Approved On: _____ Approved By: _____

Glide Glass Warm Dim Suspension w/ Center Feed Power

By PureEdge Lighting



Description

Glide Glass Warm Dim Center Feed Downlight Suspension features a diffused white lens with 100 degree beam spread. Glass available in Black, White or Mirror with optional black or white louvers. Channel lengths sold in 12 inch increments from 36 to 120 inches with 5 (4.4 watts) LED watts per foot. Available in 27D (2700K to 2000K) and 30D (3000K to 2000K) Warm Dim color temperatures. Includes rectangle canopy with 120V/24VDC Universal (UNI) power supply (dimmable with an electronic low voltage (ELV), 0-10V, or Triac (magnetic) dimmer). Note: Product is built to order.

Specifications


COLOR No Louver
 BODY FINISH Mirror Glass
 WATTAGE 15W
 DIMMER Low Voltage Electronic
 DIMENSIONS 36"L x 1.74"W x 2.5"H
 INTEGRATED LED MODULE 3 x LED/5W/120V LED

Technical Information

LAMP LIFE 50000 hours
 COLOR RENDERING 95 CRI
 LAMP COLOR 2700K Warm Dim
 LUMENS/WATT 181.20
 LUMINOUS FLUX 906 lumens



Shown in mirror glass / no louver

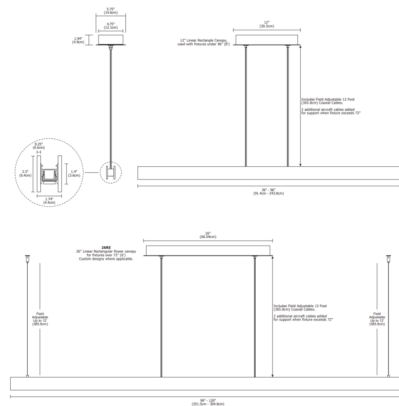

CLICK TO VIEW PRODUCT

Notes: