




DESIGNER Gregory Kay
BRAND PureEdge Lighting

DESCRIPTION

Glide Glass Warm Dim End Feed Downlight Suspension is a linear LED fixture that offers a clean direct beam. Available with one or two canopies. Features a diffused white lens with 100 degree beam spread and optional black or white louvers for adjustability. Glass available in Black, White or Mirror. Channel lengths sold in 12 inch increments from 36 to 120 inches. Available in Warm Dim 27D (2700K to 2000K) and 30D (3000K to 2000K) color temperatures with 5 LED watts per foot. Supplied with 12 feet of adjustable coaxial cables (additional aircraft cables added for support when fixture exceeds 72 inches). 120 volt input, 24VDC Class 2 output, electronic low voltage LED power supply included in canopy. Canopy size dependent on length of fixture. Dimmable with an electronic low voltage dimmer: (Lutron Diva DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600 and Lutron Radio Ra 2, or Legrand Adorne ADTP703TU), sold separately. 5 year warranty. Product is built to order.

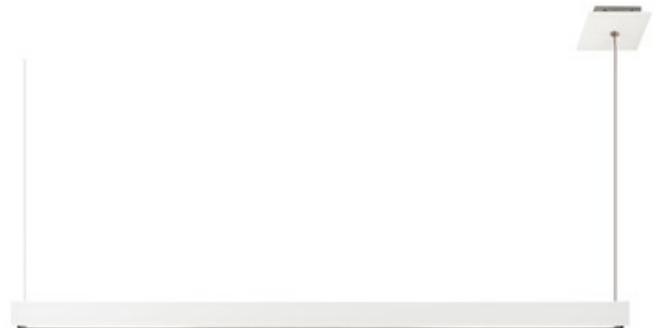


Shown in: White Glass / No Louver

SHADE COLOR	No Louver
BODY FINISH	White Glass
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	36"L x 1.74"W x 2.5"H
INTEGRATED LED MODULE	
LAMP	3 x LED/5W/120V LED

Technical Information

LUMINOUS FLUX	906 lumens
LUMENS/WATT	181.20
LAMP COLOR	2700K Warm Dim
COLOR RENDERING	95 CRI

SPEC # EDG651589

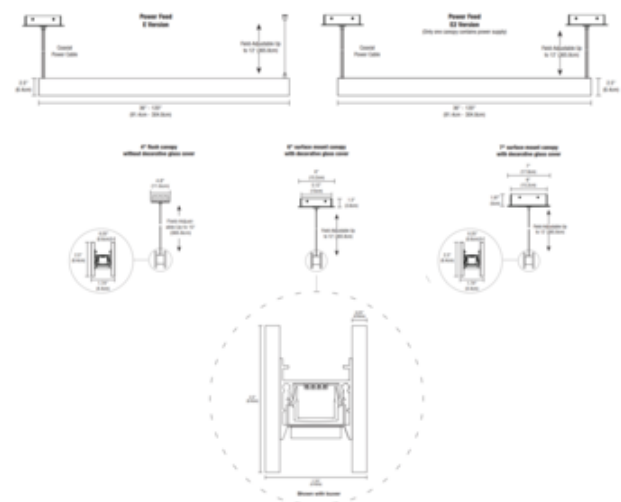

Option	CANOPY DIMS		
	1" Canopy (Flush)	1" Canopy (Surface Mount)	1" Canopy (Surface Mount)
36" L x 1.74" W	48" x 36"	48" x 36"	48" x 36"
48" L x 1.74" W	60" x 36"	60" x 36"	60" x 36"
60" L x 1.74" W	72" x 36"	72" x 36"	72" x 36"

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE