

Lightology

lightology.com
866-954-4489
08-04-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG651589**
Approved On: _____ Approved By: _____

Glide Glass Warm Dim Downlight Suspension w/ End Feed Power

By PureEdge Lighting



Description

Glide Glass Warm Dim End Feed Downlight Suspension is a linear LED fixture that offers a clean direct beam. Available with one or two canopies. Features a diffused white lens with 100 degree beam spread and optional black or white louvers for adjustability. Glass available in Black, White or Mirror. Channel lengths sold in 12 inch increments from 36 to 120 inches. Available in Warm Dim 27D (2700K to 2000K) and 30D (3000K to 2000K) color temperatures with 5 LED watts per foot. Supplied with 12 feet of adjustable coaxial cables (additional aircraft cables added for support when fixture exceeds 72 inches). 120 volt input, 24VDC Class 2 output, electronic low voltage LED power supply included in canopy. Canopy size dependent on length of fixture. Dimmable with an electronic low voltage dimmer: (Lutron Diva DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600 and Lutron Radio Ra 2, or Legrand Adorne ADTP703TU), sold separately. 5 year warranty. Product is built to order.

Specifications


COLOR No Louver
BODY FINISH White Glass
WATTAGE 15W
DIMMER Low Voltage Electronic
DIMENSIONS 36"L x 1.74"W x 2.5"H
INTEGRATED LED MODULE 3 x LED/5W/120V LED

Technical Information

LAMP LIFE 50000 hours
COLOR RENDERING 95 CRI
LAMP COLOR 2700K Warm Dim
LUMENS/WATT 181.20
LUMINOUS FLUX 906 lumens



Shown in white glass / no louver

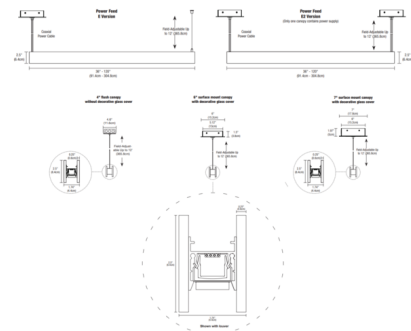

Version	4" Canopy Channel	4" Canopy End Feed Module	4" Canopy End Feed Module
36" x 1.74" Length	12" x 1.74"	12" x 1.74"	12" x 1.74"
72" x 1.74" Length	24" x 1.74"	24" x 1.74"	24" x 1.74"
108" x 1.74" Length	36" x 1.74"	36" x 1.74"	36" x 1.74"



CLICK TO VIEW PRODUCT

Notes: