

Lightology

lightology.com
866-954-4489
02-13-26

Project:

Company:

Location:

Fixture Type:

SPEC #: EDG653096

Approved On:

Approved By:

Glide Wood Downlight Suspension w/ End Feed Power

By PureEdge Lighting



Description

Glide Wood Downlight Suspension with End Feed Power is a linear LED fixture that offers direct light in a clean, contemporary style. Available with one or two canopies. Genuine hand-finished hardwood available in Walnut, Cherry, Maple, White Oak or Espresso featuring a diffused white lens with 100 degree beam spread, optional black or white louvers, a variety of finishes, three wattage options, and a spectrum of color temperature options. Channel lengths sold in 12 inch increments from 36 to 120 inches. Canopy size dependent on fixture length. 4 inch canopy available in Satin Nickel for Maple, Walnut, Cherry, and White Oak. Wood Espresso is paired with a Black canopy. Refer to canopy chart for corresponding lengths and canopy finishes. Supplied with 12 feet of adjustable coaxial cables (fixtures exceeding 72 inch include additional aircraft cables). 120 volt input, 24VDC Class 2 output, electronic low voltage LED power supply included in canopy. Dimmable with an electronic low voltage dimmer, sold separately. ETL listed. 5 year warranty. Product is built to order.

Specifications

COLOR	No Louver
BODY FINISH	Wood Walnut
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	36" L x 1.74" W x 2.5" H
INTEGRATED LED MODULE	3 x LED/5W/120V LED


Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2700K
LUMENS/WATT	147.00
LUMINOUS FLUX	735 lumens

Notes:



Shown in wood walnut / no louver

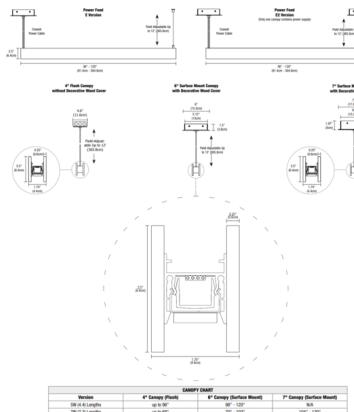

CANOPY CHART

Version: 4" Canopy (Satin Nickel) 6" Canopy (Satin Nickel) 8" Canopy (Satin Nickel)

4W (2.5 Lengths) 16.5" 37" - 102" 50" - 132"

7W (2.5 Lengths) 20.5" 37" - 102" 50" - 132"

10W (2.5 Lengths) 24.5" 37" - 102" 50" - 132"



CLICK TO VIEW PRODUCT