

Lightology

lightology.com
866-954-4489
04-22-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG655606**
 Approved On: _____ Approved By: _____

Glide Wood Warm Dim Downlight Suspension w/ End Feed Power

By PureEdge Lighting



Description

Glide Wood Warm Dim Downlight Suspension with End Feed Power is a linear LED fixture that offers direct light in a clean, contemporary style. Available with one or two canopies. Genuine hand-finished hardwood available in Walnut, Cherry, Maple, White Oak or Espresso featuring a diffused white lens with 100 degree beam spread, a variety of finishes, and optional black or white louvers. Available in Warm Dim 27D (2700K to 2000K) and 30D (3000K to 2000K) color temperatures with 5 LED watts per foot. Channel lengths sold in 12 inch increments from 36 to 120 inches. Canopy size dependent on fixture length. 4 inch canopy available in Satin Nickel for Maple, Walnut, Cherry, and White Oak. Wood Espresso is paired with a Black canopy. Refer to canopy chart for corresponding lengths and canopy finishes. Supplied with 12 feet of adjustable coaxial cables (fixtures exceeding 72 inch include additional aircraft cables). 120 volt input, 24VDC Class 2 output, electronic low voltage LED power supply included in canopy. Dimmable with an electronic low voltage dimmer, sold separately. ETL listed. 5 year warranty. Product is built to order.

Specifications


COLOR No Louver
 BODY FINISH Wood Walnut
 WATTAGE 15W
 DIMMER Low Voltage Electronic
 DIMENSIONS 36"L x 1.74"W x 2.5"H
 INTEGRATED LED MODULE 3 x LED/5W/120V LED

Technical Information

LAMP LIFE 50000 hours
 COLOR RENDERING 95 CRI
 LAMP COLOR 2700K Warm Dim
 LUMENS/WATT 181.20
 LUMINOUS FLUX 906 lumens



Shown in wood walnut / no louver

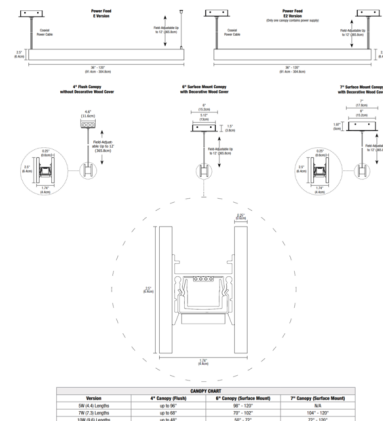

CLICK TO VIEW PRODUCT

Notes: