

# Lightology

lightology.com  
866-954-4489  
08-30-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG655606**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Glide Wood Warm Dim Downlight Suspension w/ End Feed Power

By PureEdge Lighting



### Description

Glide Wood Warm Dim Downlight Suspension with End Feed Power is a linear LED fixture that offers direct light in a clean, contemporary style. Available with one or two canopies. Genuine hand-finished hardwood available in Walnut, Cherry, Maple, White Oak or Espresso featuring a diffused white lens with 100 degree beam spread, a variety of finishes, and optional black or white louvers. Available in Warm Dim 27D (2700K to 2000K) and 30D (3000K to 2000K) color temperatures with 5 LED watts per foot. Channel lengths sold in 12 inch increments from 36 to 120 inches. Canopy size dependent on fixture length. 4 inch canopy available in Satin Nickel for Maple, Walnut, Cherry, and White Oak. Wood Espresso is paired with a Black canopy. Refer to canopy chart for corresponding lengths and canopy finishes. Supplied with 12 feet of adjustable coaxial cables (fixtures exceeding 72 inch include additional aircraft cables). 120 volt input, 24VDC Class 2 output, electronic low voltage LED power supply included in canopy. Dimmable with an electronic low voltage dimmer, sold separately. ETL listed. 5 year warranty. Product is built to order.

### Specifications


COLOR . . . . . No Louver  
BODY FINISH . . . . . Wood Walnut  
WATTAGE . . . . . 15W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 36"L x 1.74"W x 2.5"H  
INTEGRATED LED MODULE . . . . . 3 x LED/5W/120V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 95 CRI  
LAMP COLOR . . . . . 2700K Warm Dim  
LUMENS/WATT . . . . . 181.20  
LUMINOUS FLUX . . . . . 906 lumens



Shown in wood walnut / no louver

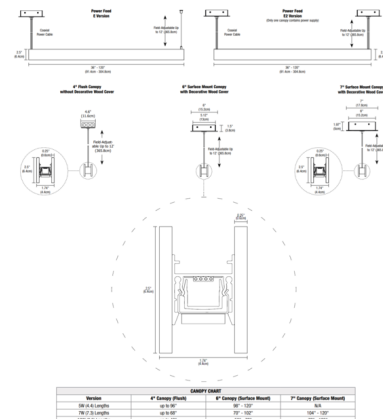

CLICK TO VIEW PRODUCT

Notes: