



**BRAND**

Oxygen

**DESCRIPTION**

The Apollo Wall Light features a steel housing with a 1/8 inch thick acrylic shade. Perforated metal top lens. Toolless entry for fluorescent option only. Compact Fluorescent: UL listed. Electronic, HPF, Programmed Start, Universal Voltage (120-277V) ballast. LED: ETL listed. Dimmable with a low voltage electronic or 0-10V dimmer, sold separately. Mounts to a 4 inch octagonal junction box.




Shown in: Satin Nickel / Matte White Acrylic

<b>SHADE COLOR</b>	Matte White Acrylic
<b>BODY FINISH</b>	Satin Nickel
<b>WATTAGE</b>	10.5W
<b>DIMMER</b>	0-10V
<b>DIMENSIONS</b>	4.5"W x 16"H x 3.75"D
<b>INTEGRATED LED MODULE</b>	
<b>LAMP</b>	1 x LED/10.5W/120-277V LED

*Technical Information*

<b>LUMINOUS FLUX</b>	809 lumens
<b>LUMENS/WATT</b>	77.05
<b>LAMP COLOR</b>	3000K
<b>COLOR RENDERING</b>	90 CRI

**SPEC #** OXY666294

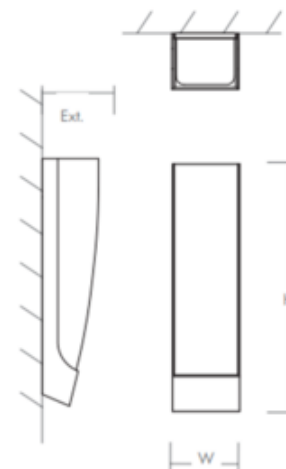

**DIMENSIONS**

<b>W:</b>	<b>4.50"</b>
<b>H:</b>	<b>16.00"</b>
<b>Ext:</b>	<b>3.75"</b>
<b>M.C:</b>	<b>7.38" From top of fixture</b>

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE