

# Lightology

lightology.com  
866-954-4489  
02-18-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **OXY666449**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Leda Outdoor Wall Sconce

By Oxygen by Quorum



### Description

The Leda Outdoor Wall Sconce features stainless steel construction and a white acrylic diffuser, dispersing ambient illumination throughout outdoor spaces including patios, decks and courtyards. The emergency backup option includes a backup battery with a 90 minute run time and 32 hour recharge time. This option is ETL rated, and the option without emergency backup is UL rated. TRIAC and ELV dimming at 120V. 0-10V dimming at 277V. Note: Not all options are available.




Shown in satin nickel / matte white acrylic

### Specifications

COLOR . . . . . Matte White Acrylic  
BODY FINISH . . . . . Satin Nickel  
WATTAGE . . . . . 10.1W  
DIMMER . . . . . Standard 120V  
DIMENSIONS . . . . . 7.25"W x 16.5"H x 4.75"D  
INTEGRATED LED MODULE . . . . . 1 x LED/10.1W/120-277V LED  
COUNTRY OF ORIGIN . . . . . China

### Technical Information

LAMP LIFE . . . . . 60000 hours  
COLOR RENDERING . . . . . 90 CRI  
LAMP COLOR . . . . . 3000K  
LUMENS/WATT . . . . . 67.33  
LUMINOUS FLUX . . . . . 680 lumens

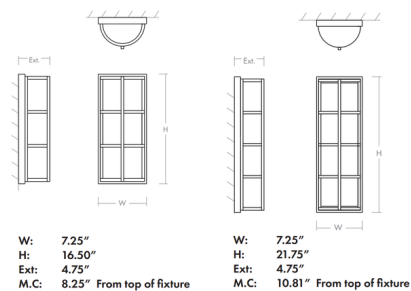

CLICK TO VIEW PRODUCT

Notes: