

# Lightology

lightology.com  
866-954-4489  
07-01-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **NOR676364**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Opal Surface Mount / Retrofit Fixture

By Nora Lighting



### Description

The Opal Series 120 Volt AC LED fixture (no driver) is designed to surface mount over a standard 3 or 4 inch junction box and .50 inch deep pancake boxes for ceiling or wall mount applications. Suitable for remodel and new construction applications and is IC rated when used with a 4 inch electrical junction box rated for direct contact with insulation. The Opal is offered in two sizes with two lumen offerings and produces even illumination without diode image. Features a one piece aluminum die formed housing and trim with a white polycarbonate diffuser. The R4509 series includes a universal bracket (NLOPAC-4BKT-2). Dimmable using a TRIAC or electronic low voltage (ELV) dimmer, sold separately. Note: Not all options available. Retrofit: Each luminaire includes a retrofit kit with medium base socket adapter to mount over 4 inch or 5 inch or 6 inch recessed housings. Kit also includes torsion spring brackets that hold luminaire flush against ceiling. Retrofit kit is intended to be used with a lighting fixture as a lamp replacement.

### Specifications


REFLECTOR/BAFFLE COLOR . . . . . White  
BODY FINISH . . . . . White  
WATTAGE . . . . . 10.5W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 4"W x 1.75"H  
INTEGRATED LED MODULE . . . . . 1 x LED/10.5W/120V LED

### Technical Information

COLOR RENDERING . . . . . 90 CRI  
LAMP COLOR . . . . . 5000K  
LUMENS/WATT . . . . . 66.67  
LUMINOUS FLUX . . . . . 700 lumens



Shown in white / white

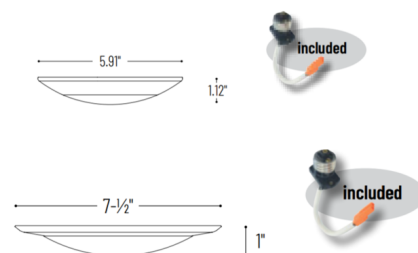

CLICK TO VIEW PRODUCT

Notes: