



BRAND

Nora Lighting

DESCRIPTION

The Iolite 2 Inch New Construction IC Air-Tight Housing features aluminum construction for use in insulated ceilings allowing direct contact with thermal insulation. The Iolite is a modular system allowing users to field change both the trim and beam spread without the use of tools. Spot, narrow flood and flood field changeable reflectors are included with each trim module. Available with a 120V power supply (TRIAC and ELV dimming), or 120/277V power supply (TRIAC/ELV/0-10V dimming). Compatible with both 800 lumen and 1000 lumen LED modules. Wet location suitable when used with compatible wet location trim. Note: A complete fixture requires a housing and trim with flange or trimless trim, sold separately.





Shown in: Aluminum

TRIM COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	14W
DIMMER	Low Voltage Electronic
DIMENSIONS	12.5"W x 4.5"H x 7.75"D
BULB NOT INCLUDED	
LAMP	1 x LED/120V LED

Technical Information

LUMINOUS FLUX	1000 lumens
LUMENS/WATT	71.43
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	4"

SPEC #	NOR676803
--------	-----------

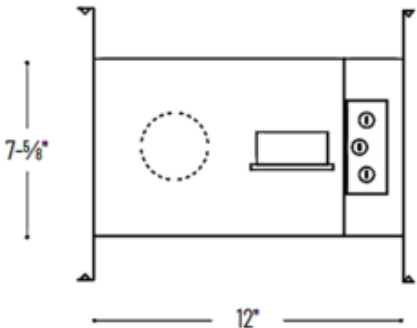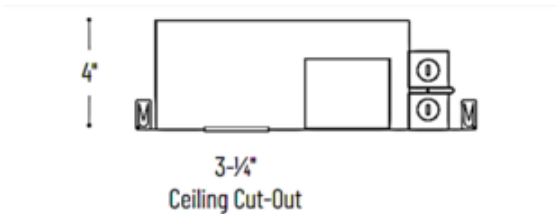

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE