Lightology

lightology.com
866-954-4489
11-08-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EDG678707**

Approved On: Approved By:

Pipeline 1 Power Up or Down Warm Dim End Feed/Two Canopies

By PureEdge Lighting

Description

Pipeline 1 Warm Dim Up or Down Suspension with End Power Feed and Two Canopies is a linear LED fixture with a clean and contemporary style. Rotates 360 degrees allowing you to shine the light up for indirect light or downward to accommodate task lighting (or anywhere in between). Pipeline 1 is available in various increments from 36 to 240 inches and features a 176 degree beam spread, a diffused white lens, optional black or white louver, 4.4 LED watts per foot, a variety of finishes, and Warm Dim 2700K to 2000K (27D) or 3000K to 2000K (30D) color temperature. Chrome finish available up to 84 inch length. Lengths over 96 inches ship in two segments. Includes two canopies with 120V/24VDC Universal (UNI) LED power supply (dimmable with a Triac (magnetic), electronic low voltage (ELV), or 0-10V dimmer), dimmer sold separately. Only one canopy contains power supply. Power supply wattage and canopy option dependent on fixture length. Supplied with 12 foot adjustable coaxial cables (additional aircraft cables are included for support when fixture exceeds 72 inches). ETL listed. Title 24 compliant. Fixture includes a 5 year warranty. Product is built to order.

Specifications


COLOR	White Lens
BODY FINISH	Satin Nickel
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	36"L x 1.25"W x 1.25"H
INTEGRATED LED MODULE	3 x LED/5W/120V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2700K Warm Dim
LUMENS/WATT	248.40
LUMINOUS FLUX	1242 lumens



Shown in satin nickel / white lens

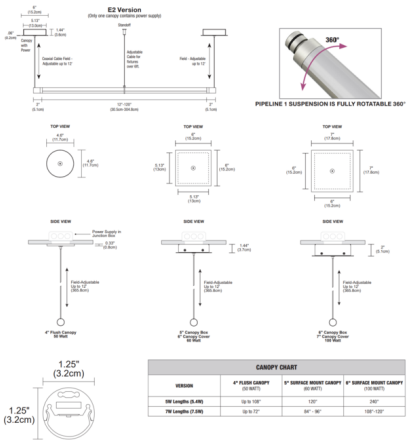

CLICK TO VIEW PRODUCT

Notes: