

Lightology

lightology.com
866-954-4489
06-04-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **EDG681531**

Approved On: _____ Approved By: _____

Pipeline 1 Power Downlight Suspension Center Feed By PureEdge Lighting



Description

Pipeline 1 Downlight Suspension with Center Power Feed is a linear LED fixture with a clean and contemporary style. Pipeline 1 is available in various increments from 36 to 120 inches, a diffused white lens with 176 degree beam spread, optional white or black louvers, a variety of finishes, three wattage options, and a spectrum of color temperature options. 84 inch maximum shipping length for Chrome finish. Includes rectangle canopy with 120V input/24VDC Universal (UNI) LED power supply (dimmable with a Triac (magnetic), electronic low voltage (ELV), or 0-10V dimmer), dimmer sold separately. Canopy size dependent on fixture length. Supplied with 12 foot adjustable coaxial cables (additional aircraft cables are included for support when fixture exceeds 72 inches). Note: Product is built to order.

Specifications


COLOR White Lens
 BODY FINISH Satin Nickel
 WATTAGE 15W
 DIMMER Low Voltage Electronic
 DIMENSIONS 36"L x 1.25"W x 1.25"H
 INTEGRATED LED MODULE 3 x LED/5W/24V LED

Technical Information

LAMP LIFE 50000 hours
 COLOR RENDERING 95 CRI
 LAMP COLOR 2700K
 LUMENS/WATT 197.40
 LUMINOUS FLUX 987 lumens



Shown in satin nickel / white lens

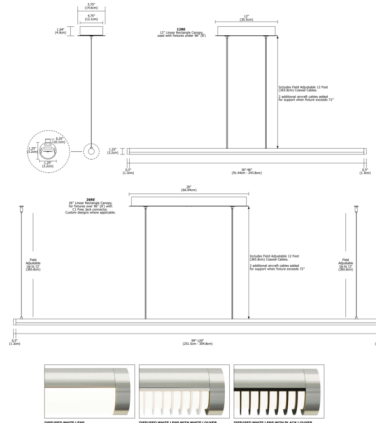

CLICK TO VIEW PRODUCT

Notes: