

Lightology

lightology.com
866-954-4489
05-17-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG681563**
 Approved On: _____ Approved By: _____

Pipeline 1 Power Warm Dim Downlight Suspension Center Feed By PureEdge Lighting



Description

Pipeline 1 Warm Dim Downlight Suspension with Center Power Feed is a linear LED fixture with a clean and contemporary style. Pipeline 1 is available in various increments from 36 to 120 inches, a diffused white lens with 176 degree beam spread, optional white or black louvers, a variety of finishes, three wattage options, and a spectrum of color temperature options. 84 inch maximum shipping length for Chrome finish. Includes rectangle canopy with 120V input/24VDC Universal (UNI) LED power supply (canopy size dependent on fixture length). Fixture dimmable with an electronic low voltage (ELV), Triac (magnetic) or 0-10V dimmer, sold separately. Supplied with 12 foot adjustable coaxial cables (additional aircraft cables are included for support when fixture exceeds 72 inches). Note: Product is built to order.

Specifications


COLOR White Lens
 BODY FINISH Satin Nickel
 WATTAGE 15W
 DIMMER Low Voltage Electronic
 DIMENSIONS 36"L x 1.25"W x 1.25"H
 INTEGRATED LED MODULE 3 x LED/5W/24V LED

Technical Information

LAMP LIFE 50000 hours
 COLOR RENDERING 95 CRI
 LAMP COLOR 2700K Warm Dim
 LUMENS/WATT 248.40
 LUMINOUS FLUX 1242 lumens



Shown in satin nickel / white lens

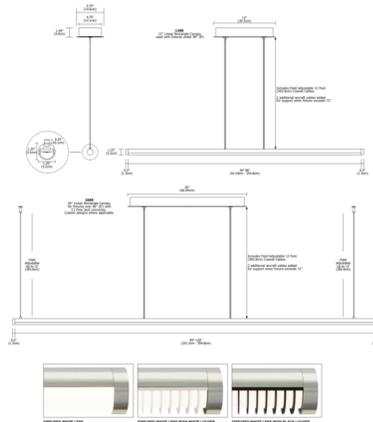

CLICK TO VIEW PRODUCT

Notes: