

# Lightology

lightology.com  
866-954-4489  
02-12-26

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG686746**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus D1 HE Warm Dim Suspension w/Remote Power End Feed

By PureEdge Lighting



### Description

The Cirrus High Efficiency Remote Power D1 Lens Warm Dim Linear Downlight Suspension with End Feed and Round or Square Canopy is a linear LED fixture that offers direct light in a clean, contemporary style. Available in various increments from 36 to 240 inches with a 100 degree white diffused D1 direct downlight lens, a variety of finishes, 4.4 LED watts per foot, and Warm Dim 2700K to 2000K (27D) or 3000K to 2000K (30D) color temperature. Chrome finish available up to 84 inch length. Includes a 4 inch round or square canopy and adjustable 12 foot coaxial and aircraft cables. Additional aircraft cables are included for support when fixture exceeds 72 inches. Note: Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (60 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Power supply, dimmer control, and optional accessories sold separately. Note: Title 24 compliant when used with 2700K color temperature and a Universal power supply. Product is built to order.

### Specifications


COLOR . . . . . White Lens  
BODY FINISH . . . . . Satin Nickel  
WATTAGE . . . . . 15W  
DIMMER . . . . . Dimmable  
DIMENSIONS . . . . . 36"L x 0.9"W x 0.9"H  
INTEGRATED LED MODULE . . . . . 3 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 95 CRI  
LAMP COLOR . . . . . 2700K Warm Dim  
LUMENS/WATT . . . . . 177.60  
LUMINOUS FLUX . . . . . 888 lumens



Shown in satin nickel / white lens

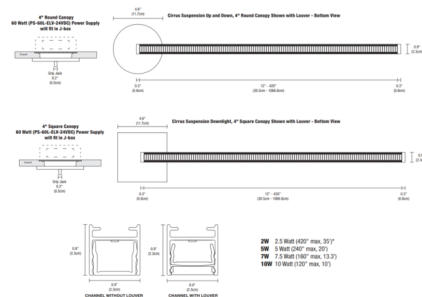

CLICK TO VIEW PRODUCT

Notes: