

# Lightology

lightology.com  
866-954-4489  
12-28-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG721630**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus D1 Warm Dim Suspension w/Power Center Feed

By PureEdge Lighting



### Description

The Cirrus Power D1 Lens Warm Dim Linear Downlight Suspension with Center Feed, with or without a Fast Jack (FJ) Port, is a linear LED fixture that offers direct light in a clean, contemporary style. Available in various increments from 36 to 420 inches with a 100 degree white diffused or 60 degree clear frosted direct downlight lens, optional black or white louver, a variety of finishes, 5 LED watts per foot, and Warm Dim 2700K to 2000K (27D) or 3000K to 2000K (30D) color temperature. Chrome finish available up to 84 inch length. Satin Black finish features Antique Bronze hardware. All other finishes feature Satin Nickel hardware. Includes a linear canopy with 120V/24VDC Universal (UNI) LED power supply and 12 foot adjustable coaxial cables. Additional aircraft cables provided for support when fixture exceeds 72 inches. Fixture lengths over 96 inches ship in two segments. Cirrus is dimmable with an electronic low voltage (ELV), Triac (magnetic), or 0-10V dimmer, sold separately. Fast Jack port (C1) includes an electronic low voltage power supply, dimmable with an electronic low voltage (ELV) dimmer, sold separately. ETL listed. Suitable for damp locations. Title 24 compliant. Fixture includes a 5 year warranty. Product is built to order. Fast Jack head required for C1 option, sold separately.

### Specifications


COLOR . . . . . White Lens  
BODY FINISH . . . . . Satin Nickel  
WATTAGE . . . . . 15W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 36"L x 0.9"W x 0.9"H  
INTEGRATED LED MODULE . . . . . 3 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 95 CRI  
LAMP COLOR . . . . . 2700K Warm Dim  
LUMENS/WATT . . . . . 141.60  
LUMINOUS FLUX . . . . . 708 lumens



Shown in satin nickel / white lens

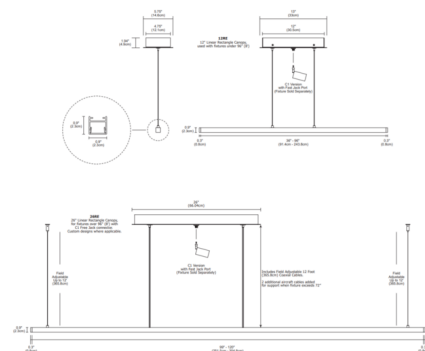

CLICK TO VIEW PRODUCT

Notes: