

Lightology

lightology.com
866-954-4489
06-29-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG733318**
 Approved On: _____ Approved By: _____

Cirrus D1 Warm Dim Linear Suspension w/Power End Feed By PureEdge Lighting



Description

The Cirrus Power D1 Lens Warm Dim Linear Downlight Suspension with End Feed and One or Two Canopies is a linear LED fixture that offers direct light in a clean, contemporary style. Available in various increments from 36 to 240 inches with a 100 degree white diffused or 60 degree clear frosted direct downlight lens, black or white louver, a variety of finishes, 4.4 LED watts per foot, and Warm Dim 2700K to 2000K (27D) or 3000K to 2000K (30D) color temperature. 60 degree lens not available without louver. Chrome finish available up to 84 inch length. Includes one or two square canopies with 120V/24VDC Class 2 electronic LED power supply and 12 foot adjustable coaxial cables. Power supply wattage and canopy option dependent on fixture length. For under 60 watts (Non-IC), the power supply will fit inside the electrical junction box. Additional aircraft cables provided for support when fixture exceeds 96 inches. Fixture lengths over 96 inches ship in two segments. Cirrus dimmable with an electronic low voltage dimmer (Legrand Adorne ADTP703TU, Lutron Diva DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600, and Lutron Radio Ra 2), sold separately. ETL listed. Fixture includes a 5 year warranty. Optional accessories sold separately. Product is built to order.

Specifications


COLOR White Lens
 BODY FINISH Satin Nickel
 WATTAGE 15W
 DIMMER Low Voltage Electronic
 DIMENSIONS 36"L x 0.9"W x 0.9"H
 INTEGRATED LED MODULE 3 x LED/5W/24V LED

Technical Information

LAMP LIFE 50000 hours
 COLOR RENDERING 95 CRI
 LAMP COLOR 2700K Warm Dim
 LUMENS/WATT 141.60
 LUMINOUS FLUX 708 lumens



Shown in satin nickel / white lens

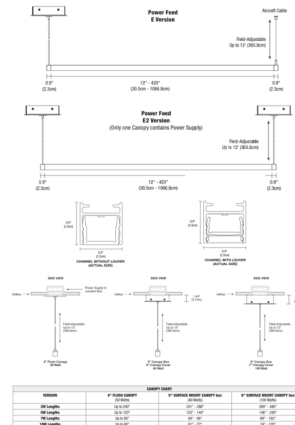

VERSION	# OF LED MODULES	# OF DIMMABLE WARM DIMMABLE LED MODULES	# OF DIMMABLE WARM DIMMABLE LED MODULES
001 (36")	3	3	3
002 (48")	4	4	4
003 (60")	5	5	5
004 (72")	6	6	6
005 (84")	7	7	7
006 (96")	8	8	8
007 (108")	9	9	9
008 (120")	10	10	10
009 (132")	11	11	11
010 (144")	12	12	12
011 (156")	13	13	13
012 (168")	14	14	14
013 (180")	15	15	15
014 (192")	16	16	16
015 (204")	17	17	17
016 (216")	18	18	18
017 (228")	19	19	19
018 (240")	20	20	20



CLICK TO VIEW PRODUCT

Notes: _____