Lightology

lightology.com
866-954-4489
10-30-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EDG736522**

Approved On: Approved By:

Cirrus D1 Linear Suspension w/Power/End Feed/One Canopy


By PureEdge Lighting

Description

The Cirrus Power D1 Lens Linear Downlight Suspension with End Feed and One Canopy is a linear LED fixture that offers direct light in a clean, contemporary style. Available in a range of increments from 36 to 420 inches and features a 100 degree beam white diffused or 60 degree clear frosted (direct downlight lens. optional white or black louver, multiple finishes, three wattage options, and a spectrum of color temperature options. 60 degree lens not available without louver. Chrome finish available up to 84 inch length. Includes canopy with 120V/24VDC Class 2 electronic low voltage LED power supply and 12 foot adjustable coaxial cables. Additional aircraft cables provided for support when fixture exceeds 96 inches. Lengths over 96 inches ship in two segments. Canopy size (4, 5 or 6 inch) and power supply wattage dependent on length of fixture. For Non-IC the 50 watt (PS-60L-ELV) power supply will fit inside the electrical junction box with a flush 4.6 inch canopy. Optional accessories sold separately. Note: Product is built to order.



Shown in satin nickel / white lens

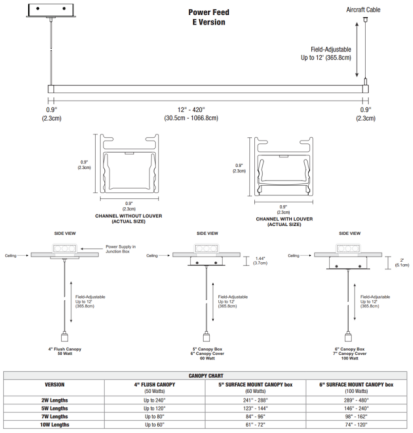

VERSION	4" FLUSH CANOPY (50 Watts)	5" SURFACE MOUNT CANOPY box (60 Watts)	6" SURFACE MOUNT CANOPY box (100 Watts)
2W Lengths	Up to 240"	241" - 288"	289" - 408"
5W Lengths	Up to 120"	123" - 144"	146" - 240"
7W Lengths	Up to 80"	84" - 96"	98" - 162"
10W Lengths	Up to 60"	61" - 72"	74" - 120"

Specifications

COLOR . . . . . White Lens
BODY FINISH . . . . . Satin Nickel
WATTAGE 6W
DIMMER . . . . . Low Voltage Electronic
DIMENSIONS . . . . . 36"L x 0.9"W x 0.9"H
INTEGRATED LED MODULE . . . . . 3 x LED/2W/24V LED

Technical Information

LAMP LIFE . . . . . 50000 hours
COLOR RENDERING . . . . . 95 CRI
LAMP COLOR 2700K
LUMENS/WATT 181.50
LUMINOUS FLUX . . . . . 363 lumens

CLICK TO VIEW PRODUCT

Notes: