



BRAND

Elite LED Lighting

DESCRIPTION

4 Inch Maxilume 1200 Lumen New Construction Downlight Housing with integral LED heat management casting and driver (installed on junction box). Features Optilux technology which combines unmatched performance with visual comfort. Features 55-60 degree optic distribution. LED driver rated for 50/60Hz at 120V input. UL listed for wet location when used with HH4-4501 trim. Dimmable to 1 percent of initial light output with a 0-10V dimmer, sold separately. A complete fixture includes a housing and trim, sold separately.




TRIM COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	17W
DIMMER	0-10V
DIMENSIONS	16"W x 5.75"H x 12.5"D
INTEGRATED LED MODULE	
LAMP	1 x LED/17W/120V LED

Technical Information

LUMINOUS FLUX	1200 lumens
LUMENS/WATT	70.59
LAMP COLOR	3000K
COLOR RENDERING	90 CRI
BEAM ANGLE	55°
LAMP LIFE	102000 hours
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC
HOUSING HEIGHT	6"

SPEC #	ELI751790
--------	-----------

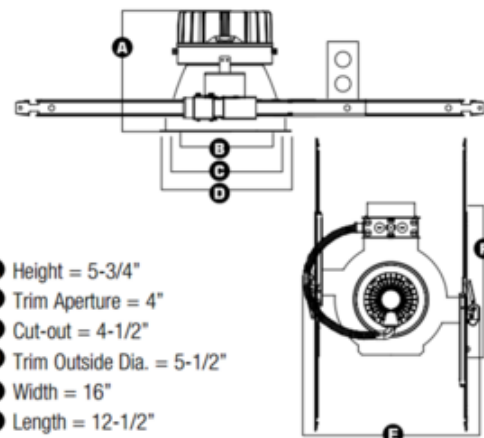

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE