

Oblique Outdoor Accent Light

SPEC # ART765388



BRAND Artemide


DESCRIPTION

Inspired by the shape of a sprouting plant, the Oblique Outdoor Accent Light's head pushes up and stretches the vertical stem, just like a bean sprout. The dimensions of the design render the piece nearly invisible from some angles, while providing solid support from others. The outer shell wraps around the lighting head to hold it in place. The slightly downward angle of Oblique projects LED light via a high-performance reflector, preventing glare and defining a quiet light zone. Available in Anthracite Grey or White. Includes 8 inch ground spike.



Shown in: Anthracite Grey

BODY FINISH Anthracite Grey WATTAGE DIMMER DIMENSIONS 3.9"W x 7.6"H x 7.1"E INTEGRATED LED MODULE				
WATTAGE 20W DIMMER N/A DIMENSIONS 3.9"W x 7.6"H x 7.1"D INTEGRATED LED MODULE LAMP 1 x LED/120V LED Technical Information LUMINOUS FLUX 780 lumens LUMENS/WATT 39.00 LAMP COLOR 3000K	SHADE COLOR	N/A		
DIMMER N/A DIMENSIONS 3.9"W x 7.6"H x 7.1"E INTEGRATED LED MODULE LAMP 1 x LED/120V LED Technical Information LUMINOUS FLUX 780 lumens LUMENS/WATT 39.00 LAMP COLOR 3000K	BODY FINISH	Anthracite Grey		
DIMENSIONS 3.9"W x 7.6"H x 7.1"D INTEGRATED LED MODULE LAMP 1 x LED/120V LED Technical Information LUMINOUS FLUX 780 lumens LUMENS/WATT 39.00 LAMP COLOR 3000k	WATTAGE	20W		
Technical Information LUMINOUS FLUX TUMENS/WATT LAMP COLOR 1 x LED/120V LED 780 lumens 39.00	DIMMER	N/A		
Technical Information LUMINOUS FLUX TUMENS/WATT LAMP COLOR 1 × LED/120V LED 780 lumens 39.00 3000k	DIMENSIONS	3.9"W x 7.6"H x 7.1"D		
Technical Information LUMINOUS FLUX 780 lumens LUMENS/WATT 39.00 LAMP COLOR 3000k	INTEGRATED LED MODULE			
LUMINOUS FLUX LUMENS/WATT LAMP COLOR 780 lumens 39.00 3000k	LAMP	1 x LED/120V LED		
LUMINOUS FLUX LUMENS/WATT LAMP COLOR 780 lumens 39.00 3000k	Technical Information			
LUMENS/WATT 39.00 LAMP COLOR 3000k		700 l		
LAMP COLOR 3000k				
COLOR RENDERING 90 CR				
	COLOR RENDERING	90 CRI		

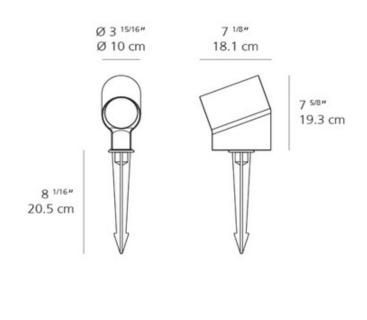

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE

ART765388

SPEC #