

# Lightology

lightology.com  
866-954-4489  
07-06-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **WAC768943**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Ocularc 3.5 inch Round New Construction IC Housing By WAC Lighting



### Description

Ocularc Architectural 3.5 Inch Round Housing features an adjustable LED light engine with vertical 0-30 degree adjustment and 365 degree horizontal adjustment. Designed for use with trimless and with trim options. Die-cast spackle frame included. Choice of 2700K, 3000K, 3500K, or 4000K color temperature. UL listed. Title 24 compliant. Suitable for wet locations. Dimmable to 1 percent with TRIAC and low-voltage electronic, and 5 percent with 0-10V dimmers. A complete fixture includes a housing and trim, sold separately.

### Specifications


|                        |                           |
|------------------------|---------------------------|
| REFLECTOR/BAFFLE COLOR | N/A                       |
| BODY FINISH            | Black                     |
| WATTAGE                | 13.5W                     |
| DIMMER                 | 0-10V                     |
| DIMENSIONS             | 12.69"W x 3.81"H x 6.44"D |
| INTEGRATED LED MODULE  | 1 x LED/13.5W/120V LED    |

### Technical Information

|                 |                              |
|-----------------|------------------------------|
| APERTURE SIZE   | 3.500"                       |
| APERTURE SHAPE  | Round                        |
| HOUSING HEIGHT  | 4"                           |
| HOUSING TYPE    | New construction IC Airtight |
| CEILING TYPE    | Drywall with Trim            |
| LAMP LIFE       | 50000 hours                  |
| BEAM ANGLE      | 51°                          |
| COLOR RENDERING | 90 CRI                       |
| LAMP COLOR      | 2700K                        |
| LUMENS/WATT     | 63.33                        |
| LUMINOUS FLUX   | 855 lumens                   |



Shown in black

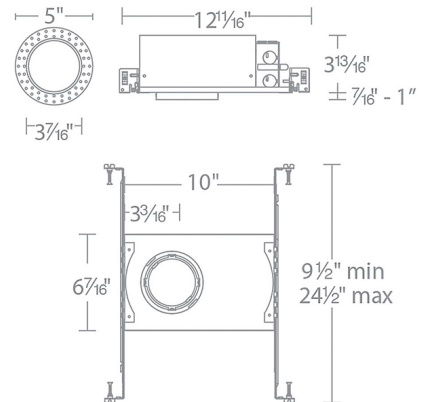

CLICK TO VIEW PRODUCT

Notes: