



air
TIGHT



BRAND

WAC Lighting

DESCRIPTION

Ocularc Architectural 3.5 Inch Square Housing features an adjustable LED light engine with vertical 0-30 degree adjustment and 365 degree horizontal adjustment. Designed for use with trimless and with trim options. Die-cast spackle frame included. Choice of 2700K, 3000K, 3500K, or 4000K color temperature. UL listed. Title 24 compliant. Suitable for wet locations. Dimmable down to 1 percent with TRIAC and low-voltage electronic and down to 5 percent with 0-10V dimmers. A complete fixture includes a housing and trim, sold separately.




Shown in: Aluminum

| | |
|-----------------------|-------------------------|
| SHADE COLOR | N/A |
| BODY FINISH | Aluminum |
| WATTAGE | 13.5W |
| DIMMER | Low Voltage Electronic |
| DIMENSIONS | 12.69"L x 10"W x 3.81"H |
| INTEGRATED LED MODULE | |
| LAMP | 1 x LED/120-277V LED |

Technical Information

| | |
|-----------------|------------------------------|
| LUMINOUS FLUX | 965 lumens |
| LUMENS/WATT | 71.48 |
| LAMP COLOR | 2700K |
| COLOR RENDERING | 90 CRI |
| BEAM ANGLE | 51° |
| LAMP LIFE | 50000 hours |
| HOUSING TYPE | New construction IC Airtight |
| HOUSING HEIGHT | 3" |
| APERTURE SHAPE | Square |

SPEC # WAC768947

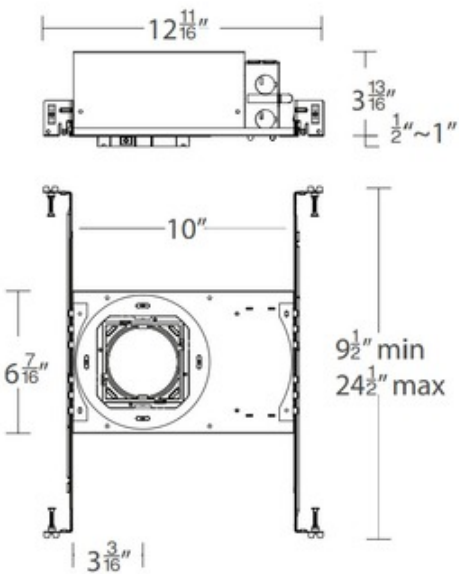

| | | | | |
|---------|---------|--------------|-------------|------|
| COMPANY | PROJECT | FIXTURE TYPE | APPROVED BY | DATE |
| | | | | |