



BRAND

PureEdge Lighting

DESCRIPTION

The PSB-200W-24VDC-RGB Class 2 LED Power Supply accepts input voltage in a range of 120/240 volts AC and outputs 24 volts DC power up to 200 watts. The integrated RGB driver receives signals from CDP, CTP, CDMX1-RGBW or CDMX1-2XK to control RGB color mixing and light intensity.


Features short circuit and overload protection. For indoor applications only. To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location.

Power Input: 120/240VAC, 50/60Hz. Power Output: Class 2, 24VDC, 8.3A, 200 watts maximum.

Compatible Controllers: Touch Screen Controller with Power Supply (CTP), Color Dial Controller with Power Supply (CDP), DMX 1-Zone RGBW Touch Controller (CDMX1-RGBW), or Tunable White Touch Controller (CDMX1-2XK), sold separately. ETL listed. 12 inch width x 8 inch depth x 4.3 inch height.



SHADE COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	200W
DIMMER	Dimmable
DIMENSIONS	12"W x 4.3"H x 8"D
BULB NOT INCLUDED	
LAMP	LED/200W/24V LED

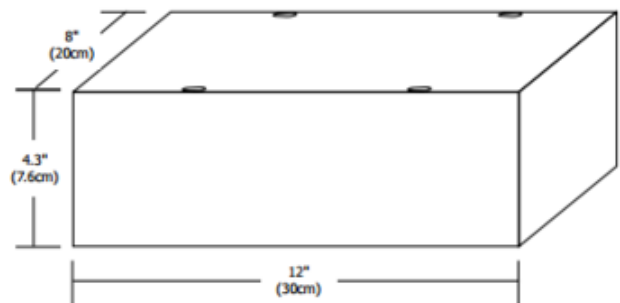

SPEC # EDG77297

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE