



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

Pipeline 2 Suspension Warm Dim Downlight with Remote End Feed Power and Square Canopy is a linear LED fixture with a clean and contemporary style. Pipeline 2 is available in 12 inch increments from 36 to 240 inches (5 watt) and features a 176 degree beam spread with a 280 degree diffused white lens with optional black or white louver, a variety of finishes, and Warm Dim (27D) 2700K-1800K or (30D) 3000K-1800K color temperature options. Chrome finish available up to 84 inch length. Includes one 4 inch square canopy and 12 foot adjustable coaxial cables. Lengths over 96 inches ship as two segments. Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (50 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply up to 100 watts at a maximum of 40 feet away. Universal dimming (TRIAC/ELV/0-10V). ELV dimming with 50 Watt (PS-60L-ELV) power supply. Power supply, dimmer control, and optional accessories sold separately. Note: Product is built to order




Shown in: Satin Nickel / White Lens

SHADE COLOR	White Lens
BODY FINISH	Satin Nickel
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	36"L x 1.24"W x 1.24"H
INTEGRATED LED MODULE	
LAMP	3 x LED/24V LED

Technical Information

LUMINOUS FLUX	1242 lumens
LUMENS/WATT	248.40
LAMP COLOR	2700K Warm Dim
COLOR RENDERING	95 CRI

SPEC # EDG777827

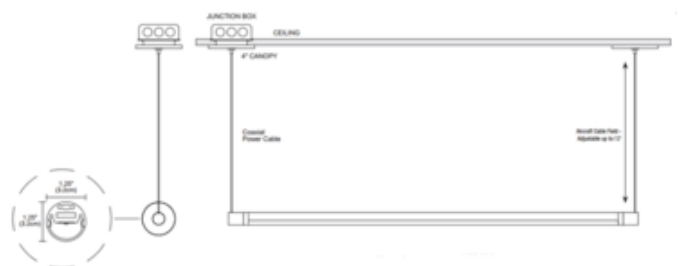

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE