

# Lightology

lightology.com  
866-954-4489  
06-04-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **ELE780732**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Reflections Bloom Indirect Downlight / Remodel Housing

By Visual Comfort Architectural



### Description


The Reflections Bloom Remodel Housing with Flanged or Flangeless ceiling plane options combine decorative recessed domes with indirect LED illumination. Flanged for a more traditional ceiling appearance or flangeless for a smooth, mud-in ceiling appearance. Available in 5, 8 and 12 inch diameter options, the domes act as reflectors to a completely hidden ring of up-firing LEDs. Flanged trims accommodate a .50 to 1 inch ceiling thickness. Flangeless includes an integral mud plate. IC remodel housing (suitable up to R60 spray foam insulation) with a remote junction box. Universal 120V-277V. Supplied with a constant current driver. Dimmable to 5 percent with an electronic low voltage, Triac, or 0-10V dimmer, sold separately.

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	9W
DIMMER	Low Voltage Electronic
DIMENSIONS	5"W x 3.1"H
INTEGRATED LED MODULE	1 x LED/9W/120V LED

### Technical Information

APERTURE SIZE	5.000"
APERTURE SHAPE	Round
HOUSING HEIGHT	4"
HOUSING TYPE	Remodel IC
CEILING TYPE	Drywall with Trim
FUNCTION	Decorative
LAMP LIFE	50000 hours
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	76.00
LUMINOUS FLUX	684 lumens

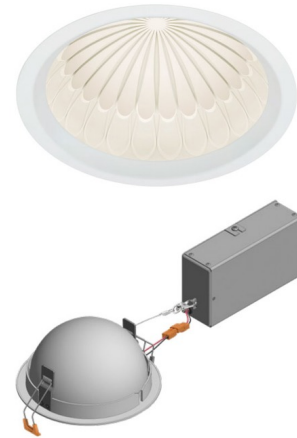

Shown in white

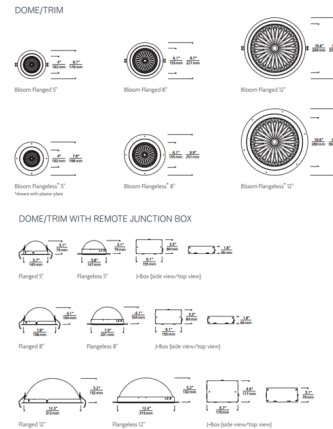

CLICK TO VIEW PRODUCT

Notes: