

Lightology

lightology.com
866-954-4489
05-24-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **ELE780870**
 Approved On: _____ Approved By: _____

Reflections Bloom Indirect Downlight / Remodel Housing

By Visual Comfort Architectural



Description


The Reflections Bloom Remodel Housing with Flanged or Flangeless ceiling plane options combine decorative recessed domes with indirect LED illumination. Flanged for a more traditional ceiling appearance or flangeless for a smooth, mud-in ceiling appearance. Available in 5, 8 and 12 inch diameter options, the domes act as reflectors to a completely hidden ring of up-firing LEDs. Flanged trims accommodate a .50 to 1 inch ceiling thickness. Flangeless includes an integral mud plate. IC remodel housing (suitable up to R60 spray foam insulation) with a remote junction box. Universal 120V-277V. Supplied with a constant current driver. Dimmable to 5 percent with an electronic low voltage, Triac, or 0-10V dimmer, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	8"W x 4.1"H
INTEGRATED LED MODULE	1 x LED/15W/120V LED

Technical Information

APERTURE SIZE	8.000"
APERTURE SHAPE	Round
HOUSING HEIGHT	5"
HOUSING TYPE	Remodel IC
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Decorative
LAMP LIFE	50000 hours
COLOR RENDERING	90 CRI
LAMP COLOR	3000K Warm Dim
LUMENS/WATT	83.67
LUMINOUS FLUX	1255 lumens

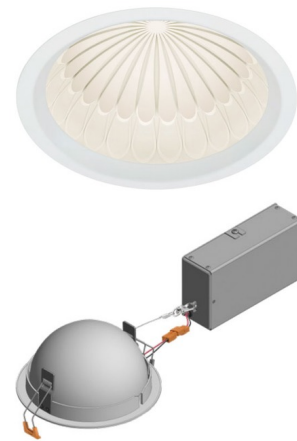

Shown in white

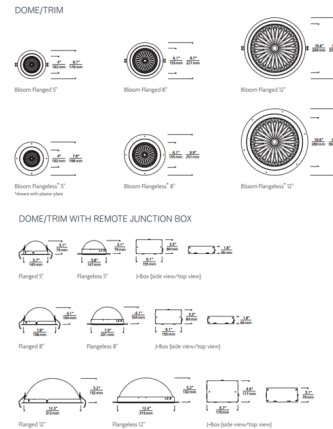

CLICK TO VIEW PRODUCT

Notes: