

Lightology

lightology.com
866-954-4489
04-04-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG786591**
 Approved On: _____ Approved By: _____

Pix Sticks Tie Stix Metal Warm Dim Suspension with Power

By PureEdge Lighting



Description

The Pix Sticks Tie Stix Warm Dim Metal Suspension is the essence of modernity with alluring sleek metal finishes that demand attention. Features linear channels that intersect at alternate heights casting downlight illumination through diffused white lenses. Channel finish available in Satin Nickel, Antique Bronze, White, Chrome, or Satin Black. Satin Nickel and White finishes supplied with matching canopy and hardware. Satin Black, Antique Bronze and Chrome finishes supplied with a Black canopy. Offered in three, five or seven stick options from 39 to 96 inches in length. Includes 5 watts per foot per channel in Warm Dim 2700K-2000K (27D) and 3000K-2000K (30D) color temperature. Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of incandescent and halogen light sources. Supplied with a metal canopy (12 inch for 3 and 5-stick and 16 inch for 7-stick), a 120 volt input, 24VDC Class 2 output electronic low voltage LED power supply, and 12 feet of suspension cable. Dimmable with an electronic low voltage dimmer: (recommended: Lutron Diva DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600, and Lutron Radio Ra 2, or Legrand Adorne ADTP703TU), sold separately. ETL listed. Suitable for damp locations. 5 year warranty. Product is built to order.

Specifications


COLOR	Satin Nickel
BODY FINISH	Satin Nickel
WATTAGE	100W
DIMMER	Low Voltage Electronic
DIMENSIONS	48"L x 1.24"W x 1.24"H
INTEGRATED LED MODULE	20 x LED/5W/120V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	92 CRI
LAMP COLOR	2700K Warm Dim
LUMENS/WATT	1,080.00
LUMINOUS FLUX	5400 lumens



Shown in satin nickel / satin nickel

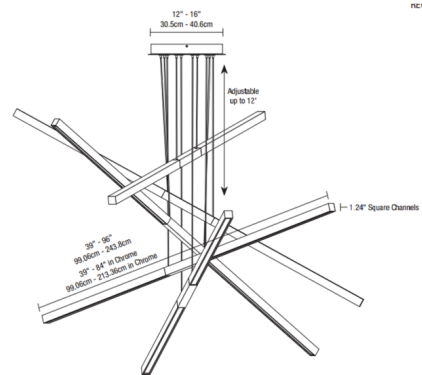

CLICK TO VIEW PRODUCT

Notes: