

Lightology

lightology.com
866-954-4489
12-07-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG788071**
Approved On: _____ Approved By: _____

Pix Sticks Tie Stix Metal Warm Dim Suspension Remote Power

By PureEdge Lighting



Description


The Pix Sticks Tie Stix Metal Warm Dim Suspension with Remote Power is the essence of modernity with alluring sleek metal finishes that demand attention. Remote power allows for easier replacement in hard-to-reach spaces such as atriums. Features linear channels that intersect at alternate heights casting downlight illumination through diffused white lenses. Offered in three, five or seven stick channel options from 39-96 inches in length. Includes 5 watts per foot per channel in Warm Dim 2700K-2000K (27D) or 3000K-2000K (30D) color temperature. Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of incandescent and halogen light sources. ETL listed. Title 24 compliant when used with a Universal (UNI) power supply. Product is built to order. .Note: Fixture requires a 24VDC remote Universal (UNI) LED power supply. Supplied with a metal canopy (12 inch for 3 and 5-stick and 16 inch for 7-stick), and 12 feet of suspension cable. Required power supply and compatible dimmer control, sold separately. Note: Channel finishes in Satin Nickel, Satin Black, Chrome, Antique Bronze or White. Satin Nickel and White finishes supplied with matching canopy and hardware. Satin Black, Antique Bronze and Chrome finishes supplied with a Black canopy.

Specifications


COLOR Satin Nickel
BODY FINISH Satin Black
WATTAGE 100W
DIMMER Low Voltage Electronic
DIMENSIONS 48"L x 1.24"W x 1.24"H
INTEGRATED LED MODULE 20 x LED/5W/24V LED

Technical Information

LAMP LIFE 50000 hours
COLOR RENDERING 92 CRI
LAMP COLOR 2700K Warm Dim
LUMENS/WATT 1,080.00
LUMINOUS FLUX 5400 lumens

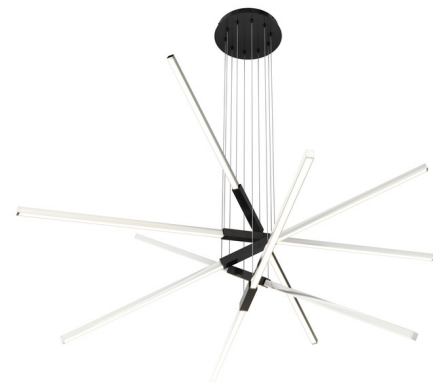

Shown in satin black / satin nickel



Ordering Code (Channel Size)	Actual channel length (inches)	Actual channel width (inches)
39	39.0	1.24
48	48.0	1.24
57	57.0	1.24
66	66.0	1.24
75	75.0	1.24
84	84.0	1.24
93	93.0	1.24



CLICK TO VIEW PRODUCT

Notes: