



lightology.com  
866-954-4489  
12-28-25

Project: \_\_\_\_\_

Company: \_\_\_\_\_

Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

SPEC #: **EDG797625**

Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Pipeline 2 Power Warm Dim Downlight Suspension Center Feed

By PureEdge Lighting



### Description

Pipeline 2 Warm Dim Downlight Suspension with Center Power Feed is a linear LED fixture with a clean and contemporary style. Pipeline 2 is available in various increments from 36 to 120 inches and features a diffused white lens, 4.4 LED watts per foot, Warm Dim 2700K to 2000K (27D) or 3000K to 2000K (30D) color temperature. Chrome finish available up to 84 inch length. Includes a linear canopy with 120V/24VDC output Universal (UNI) LED power supply (dimmable ELV/TRIAC/0-10V) and 12 foot coaxial aircraft cables. Additional aircraft cables included for support when fixture exceeds 72 inches. Canopy size dependent on length of fixture. Note: Product is built to order.

### Specifications


COLOR	N/A
BODY FINISH	Satin Nickel
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	36"L x 1.25"W x 1.25"H
INTEGRATED LED MODULE	3 x LED/5W/120V LED

### Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2700K Warm Dim
LUMENS/WATT	248.40
LUMINOUS FLUX	1242 lumens



Shown in satin nickel

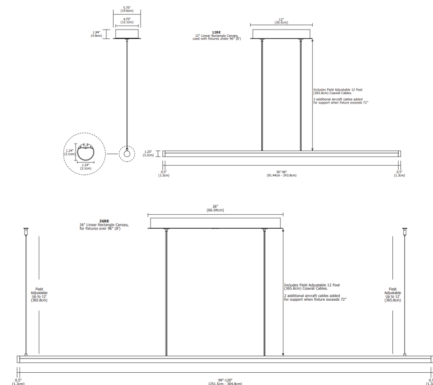

CLICK TO VIEW PRODUCT

Notes:

\_\_\_\_\_