

Lightology

lightology.com
866-954-4489
02-15-26

Project:

Company:

Location:

Fixture Type:

SPEC #: EDG797625

Approved On:

Approved By:

Pipeline 2 Power Warm Dim Downlight Suspension Center Feed

By PureEdge Lighting




Description

Pipeline 2 Warm Dim Downlight Suspension with Center Power Feed is a linear LED fixture with a clean and contemporary style. Pipeline 2 is available in various increments from 36 to 120 inches and features a diffused white lens, 4.4 LED watts per foot, Warm Dim 2700K to 2000K (27D) or 3000K to 2000K (30D) color temperature. Chrome finish available up to 84 inch length. Includes a linear canopy with 120V/24VDC output Universal (UNI) LED power supply (dimmable ELV/TRIAC/0-10V) and 12 foot coaxial aircraft cables. Additional aircraft cables included for support when fixture exceeds 72 inches. Canopy size dependent on length of fixture. Note: Product is built to order.



Shown in satin nickel

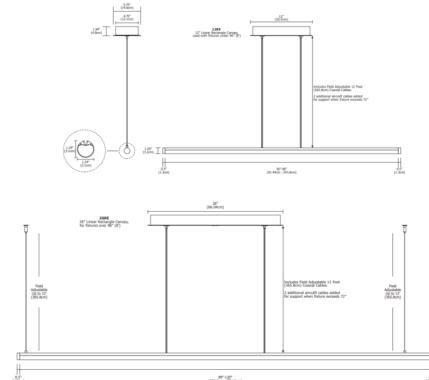

Specifications

COLOR	N/A
BODY FINISH	Satin Nickel
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	36" L x 1.25" W x 1.25" H
INTEGRATED LED MODULE	3 x LED/5W/120V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2700K Warm Dim
LUMENS/WATT	248.40
LUMINOUS FLUX	1242 lumens



CLICK TO VIEW PRODUCT

Notes: