

Lightology

lightology.com
866-954-4489
12-09-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG798151**
Approved On: _____ Approved By: _____

Pipeline 2 Warm Dim Downlight Suspension End Feed/One Canopy

By PureEdge Lighting



Description

Pipeline 2 Warm Dim Linear Downlight Suspension with End Power Feed brings together form, function and style with an industrial edge and contemporary appeal. Features a clean, uninterrupted direct beam of light through a diffused white 280 degree lens. Pipeline 2 is available in various increments from 12 to 120 inches with 5 watts (4.4 watts) per foot, a variety of finishes, and Warm Dim 2700K to 2000K (27D) or 3000K to 2000K (30D) color temperature. Chrome finish available up to 84 inch length. Includes canopy with 120V/24VDC electronic low voltage LED power supply. For 50 watts (IC) or 60 watt (Non-IC), the power supply will fit inside the electrical junction box with the included canopy. Includes 12 foot adjustable coaxial cables. Additional aircraft cables included for support when fixture exceeds 72 inches. Canopy size varies by length of fixture. Note: Product is built to order.

Specifications


COLOR White Lens
BODY FINISH Satin Nickel
WATTAGE 15W
DIMMER Low Voltage Electronic
DIMENSIONS 36"L x 1.25"W x 1.25"H
INTEGRATED LED MODULE 3 x LED/5W/120V LED

Technical Information

LAMP LIFE 50000 hours
COLOR RENDERING 95 CRI
LAMP COLOR 2700K Warm Dim
LUMENS/WATT 248.40
LUMINOUS FLUX 1242 lumens



Shown in satin nickel / white lens

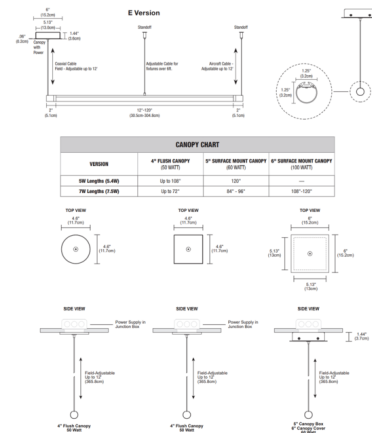

CLICK TO VIEW PRODUCT

Notes: