Lightology

lightology.com
866-954-4489
11-09-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EDG819578**

Approved On: Approved By:

Pipeline 2 Vanity Wall Warm Dim End Feed w/ Power


By PureEdge Lighting

Description

The Pipeline 2 Vanity Wall Warm Dim with End Feed features a tubular diffused white lens with a 174 degree beam angle and 280 degrees of diffused light. Available in a variety of finishes, Warm Dim 2700K-2000K (27D) or 3000K-2000K (30D) color temperature options, 5 LED watts per foot (lengths from 9 to 120 inches). Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of incandescent and halogen light sources. Includes a 120V-24VDC Universal power supply (dimmable ELV/ TRIAC/0-10V) which fits inside a standard junction box and a 4.6 inch round end feed canopy. ETL listed. ADA compliant. Suitable for indoor damp locations. 5 year pro-rated warranty. Note: Max Length for Chrome finish = 84 inch.



Shown in chrome / white

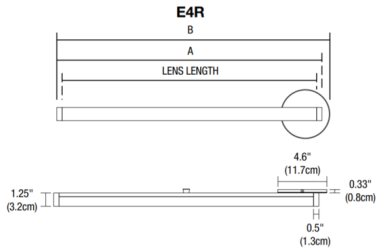

WARM DIM (27D & 30D)

Ordering Code Example	Lens Length	Overall Length Dimension 'A' E1R+E1R2	Overall Length Dimension 'B' E4R	Overall Length Dimension 'B' E4R2	Total Wattage (5W)	Total Lumens 3000K (5W)
12	12	13	15	17	5	618
15	15	16	18	20	6.5	764
18	18	19	21	23	7.5	917
24	24	25	27	29	10	1223
36	36	37	39	41	15	1835
48	48	49	51	53	20	2447
60	60	61	63	65	25	3059
72	72	73	75	77	30	3670
96	96	97	99	101	40	4894
120	120	121	123	125	50	6118

Specifications

COLOR . . . . . White
BODY FINISH . . . . . Chrome
WATTAGE 15W
DIMMER . . . . . Low Voltage Electronic
DIMENSIONS . . . . . 30"L x 4.6"W x 1.58"D
INTEGRATED LED MODULE . . . . . 3 x LED/5W/120V LED

Technical Information

LAMP LIFE . . . . . 50000 hours
COLOR RENDERING . . . . . 95 CRI
LAMP COLOR . . . . . 2700K Warm Dim
LUMENS/WATT 180.00
LUMINOUS FLUX . . . . . 900 lumens

CLICK TO VIEW PRODUCT

Notes: