



**DESIGNER**

Gregory Kay

**BRAND**

PureEdge Lighting

**DESCRIPTION**

Cirrus Ceiling Channel D1 Lens High Efficiency Downlight with Remote 24VDC Power is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 12 to 480 inches, features a 60 degree beam spread clear frosted or 100 degree beam spread diffused white lens, two wattage options, and a spectrum of color temperatures including Warm Dim. Mounting clips (C-MCL) are included for use every 24 inches. Includes a 4.6 inch square canopy that mounts to a standard junction box either using the PS-60L-ELV-24VDC (60 Watt Non-IC 24 Volt DC Power Supply) which fits inside junction box, or from a remote electronic low voltage (ELV), Universal (UNI), 0-10, or Lutron Hi-Lume power supply feeding 24VDC up to 100 watts at a maximum of 40 feet away, sold separately. ETL listed. Title 24 compliant when used with a Universal (UNI) power supply. Fixture includes a 5 year warranty. Required remote power supply, dimmer control, and optional mounting accessories, sold separately. Product is built to order.




Shown in: Satin Nickel / White Lens

<b>SHADE COLOR</b>	White Lens
<b>BODY FINISH</b>	Satin Nickel
<b>WATTAGE</b>	5W
<b>DIMMER</b>	Low Voltage Electronic
<b>DIMENSIONS</b>	12"L x 0.9"W x 0.9"H
<b>LAMP</b>	1 x LED/5W/24V LED

*Technical Information*

<b>LUMINOUS FLUX</b>	260 lumens
<b>LUMENS/WATT</b>	52.00
<b>LAMP COLOR</b>	2700 K
<b>COLOR RENDERING</b>	95 CRI

**ITEM NUMBER** EDG821371

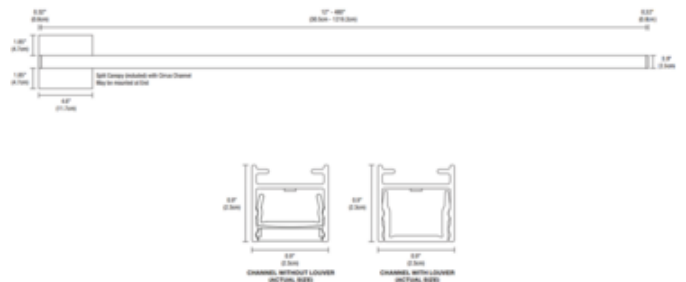

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE