

Lightology

lightology.com
866-954-4489
06-30-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG821551**
 Approved On: _____ Approved By: _____

Cirrus Ceiling D1 Warm Dim HE Downlight w/ Remote Power

By PureEdge Lighting



Description

Cirrus Ceiling Channel D1 Lens Warm Dim High Efficiency (HE) Downlight with Remote Power is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 12 to 240 inches, features a 60 degree beam spread clear frosted or 100 degree beam spread diffused white lens, 5 LED watts per foot, and Warm Dim 2700K-1900K (27D) or 3000K-2200K (30D) color temperature. ETL listed. Title 24 compliant when used with Universal (UNI) power supply. Fixture includes a 5 year warranty. Product is built to order. Note: Pre-wired for use with remote power supplies: PS-60L-ELV-24VDC (60 Watt Non-IC 24 Volt DC Power Supply) which fits inside junction box, or from a remote Universal (UNI) power supply. Required remote power supply, dimmer control, and optional mounting accessories, sold separately. Note: Includes a 4.6 inch square canopy. Mounting clips (C-MCL) are included for use every 24 inches.

Specifications


COLOR White Lens
 BODY FINISH Satin Nickel
 WATTAGE 5W
 DIMMER Low Voltage Electronic
 DIMENSIONS 12"L x 0.9"W x 0.9"H
 INTEGRATED LED MODULE 1 x LED/5W/24V LED

Technical Information

LAMP LIFE 50000 hours
 COLOR RENDERING 95 CRI
 LAMP COLOR 2700K Warm Dim
 LUMENS/WATT 58.20
 LUMINOUS FLUX 291 lumens



Shown in satin nickel / white lens

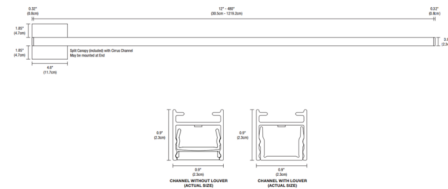

CLICK TO VIEW PRODUCT

Notes: