



lightology.com  
866-954-4489  
12-28-25

Project: \_\_\_\_\_

Company: \_\_\_\_\_

Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

SPEC #: **EDG821551**

Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus Ceiling D1 Warm Dim HE Downlight w/ Remote Power

By PureEdge Lighting



### Description

Cirrus Ceiling Channel D1 Lens Warm Dim High Efficiency (HE) Downlight with Remote Power is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 12 to 240 inches, features a 60 degree beam spread clear frosted or 100 degree beam spread diffused white lens, 5 LED watts per foot, and Warm Dim 2700K-1900K (27D) or 3000K-2200K (30D) color temperature. ETL listed. Title 24 compliant when used with Univeral (UNI) power supply. Fixture includes a 5 year warranty. Product is built to order.

Note: Pre-wired for use with remote power supplies: PS-60L-ELV-24VDC (60 Watt Non-IC 24 Volt DC Power Supply) which fits inside junction box, or from a remote Universal (UNI) power supply. Required remote power supply, dimmer control, and optional mounting accessories, sold separately. Note: Includes a 4.6 inch square canopy. Mounting clips (C-MCL) are included for use every 24 inches.

### Specifications


COLOR . . . . . White Lens  
BODY FINISH . . . . . Satin Nickel  
WATTAGE . . . . . 5W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 12"L x 0.9"W x 0.9"H  
INTEGRATED LED MODULE . . . . . 1 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 95 CRI  
LAMP COLOR . . . . . 2700K Warm Dim  
LUMENS/WATT . . . . . 58.20  
LUMINOUS FLUX . . . . . 291 lumens



Shown in satin nickel / white lens

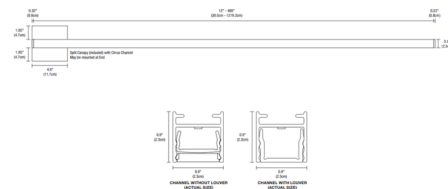

CLICK TO VIEW PRODUCT

Notes:

\_\_\_\_\_