Lightology

lightology.com
866-954-4489
11-08-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EDG821551**

Approved On: Approved By:

Cirrus Ceiling D1 Warm Dim HE Downlight w/ Remote Power


By PureEdge Lighting

Description

Cirrus Ceiling Channel D1 Lens Warm Dim High Efficiency (HE) Downlight with Remote Power is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 12 to 240 inches, features a 60 degree beam spread clear frosted or 100 degree beam spread diffused white lens, 5 LED watts per foot, and Warm Dim 2700K-1900K (27D) or 3000K-2200K (30D) color temperature. ETL listed. Title 24 compliant when used with Univeral (UNI) power supply. Fixture includes a 5 year warranty. Product is built to order. Note: Pre-wired for use with remote power supplies: PS-60L-ELV-24VDC (60 Watt Non-IC 24 Volt DC Power Supply) which fits inside junction box, or from a remote Universal (UNI) power supply. Required remote power supply, dimmer control, and optional mounting accessories, sold separately. Note: Includes a 4.6 inch square canopy. Mounting clips (C-MCL) are included for use every 24 inches.



Shown in satin nickel / white lens

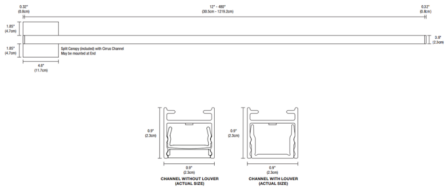

Specifications

COLOR	White Lens
BODY FINISH	Satin Nickel
WATTAGE	5W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"L x 0.9"W x 0.9"H
INTEGRATED LED MODULE	1 x LED/5W/24V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2700K Warm Dim
LUMENS/WATT	58.20
LUMINOUS FLUX	291 lumens

CLICK TO VIEW PRODUCT

Notes: