

Lightology

lightology.com
866-954-4489
12-28-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG823291**
Approved On: _____ Approved By: _____

Cirrus Ceiling D1 Lens Warm Dim Downlight w/ Remote Power

By PureEdge Lighting



Description

Cirrus Ceiling Channel D1 Lens Warm Dim Downlight with Remote 24VDC Power is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 12 to 240 inches, features a 60 degree beam spread clear frosted or 100 degree beam spread diffused white lens, optional black or white louver, 5 LED watts per foot, and Warm Dim 2700K-1900K (27D) or 3000K-2200K (30D) color temperature. Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of incandescent and halogen light sources. Lengths over 96 inches ship as two segments. ETL listed. Title 24 compliant with Universal (UNI) power supply. Fixture includes a 5 year warranty. Required remote power supply, dimmer control, and optional mounting accessories, sold separately. Product is built to order. Note: Pre-wired for use with remote power supplies: PS-60L-ELV-24VDC (60 Watt Non-IC 24 Volt DC Power Supply) which fits inside junction box, or from a remote Universal (UNI) power supply, sold separately. Note: Includes a 4.6 inch square canopy that mounts to a standard junction box. Mounting clips (C-MCL) are included for use every 24 inches.

Specifications


COLOR White Lens
BODY FINISH Satin Nickel
WATTAGE 5W
DIMMER Low Voltage Electronic
DIMENSIONS 12"L x 0.9"W x 0.9"H
INTEGRATED LED MODULE 1 x LED/5W/24V LED

Technical Information

LAMP LIFE 50000 hours
COLOR RENDERING 95 CRI
LAMP COLOR 2700K Warm Dim
LUMENS/WATT 42.20
LUMINOUS FLUX 211 lumens



Shown in satin nickel / white lens

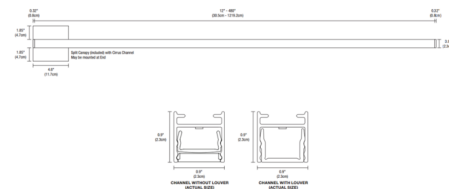

CLICK TO VIEW PRODUCT

Notes: