

# Lightology

lightology.com  
866-954-4489  
04-09-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG825355**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus Ceiling 4S Warm Dim Wall Grazer w/ Remote Power By PureEdge Lighting



### Description

Cirrus Ceiling Channel Warm Dim Wall Grazer with Remote Power and a 4 inch square canopy is a linear LED fixture that offers direct light in a clean, contemporary style. May be recessed in ceiling, perimeter or cove. Available in various increments from 12 to 120 inches, features a clear lens with a 10 degree or frosted lens with a 20 degree beam spread, a variety of finish options, 5 LED watts per foot, and Warm Dim 2700K-2000K (27D) or 3000K-2000K (30D) color temperature. Chrome finish available up to 84 inch length. Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of incandescent and halogen light sources. ETL listed. Title 24 compliant when used with a Universal (UNI) power supply. Fixture includes a 5 year warranty. Product is built to order. Note: Pre-wired for use with remote power supplies: PS-60L-ELV-24VDC (60 Watt Non-IC 24 Volt DC Power Supply) which fits inside junction box, or from a remote Universal (UNI) power supply, sold separately. Required power supply, dimmer control, and optional mounting accessories, sold separately. Note: Channel includes a 4.6 inch square split canopy. Ceiling lock clips (CC-MCL-L) are provided for support every 48 inches.

### Specifications


COLOR . . . . . Frosted  
 BODY FINISH . . . . . Satin Nickel  
 WATTAGE . . . . . 5W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 12"L x 0.9"W x 0.9"H  
 INTEGRATED LED MODULE . . . . . 1 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 COLOR RENDERING . . . . . 95 CRI  
 LAMP COLOR . . . . . 2700K Warm Dim



Shown in satin nickel / frosted

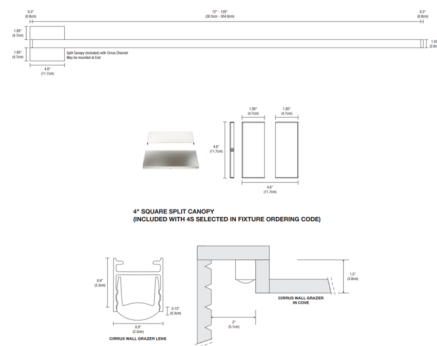

CLICK TO VIEW PRODUCT

Notes: