

# Lightology

lightology.com  
866-954-4489  
02-12-26

Project:

Company:

Location:

Fixture Type:

SPEC #: **EDG826953**

Approved On:

Approved By:

## Cirrus R1 Warm Dim Suspension w/Remote/End Feed/SQ Canopy

By PureEdge Lighting



### Description

The Cirrus R1 Lens End Feed Suspension with Remote 24VDC Power Supply (sold separately) and Square Canopy is a linear LED fixture that offers direct light in a clean, contemporary style. Features a diffused white rectangular lens with a 140 degree beam spread available in various increments from 36 to 240 inches, a variety of finishes, 5 LED watts per foot, and Warm Dim 2700K-2000K (27D) or 3000K-2000K (30D) color temperature. Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of incandescent and halogen light sources. Includes one 4.6 inch square canopy and 12 foot adjustable coaxial cables (additional aircraft cables included for support when fixture exceeds 96 inches). ETL listed. Title 24 compliant when used with a Universal (UNI) power supply. Fixture includes a 5 year warranty. Product is built to order. Note: Pre-wired for use with remote power supplies: PS-60L-ELV-24VDC (60 Watt Non-IC 24 Volt DC Power Supply) which fits inside junction box, or from a remote Universal (UNI) power supply. Required power supply, dimmer control, and optional mounting accessories, sold separately. Note: Includes a 4.6 inch square canopy that mounts on a standard junction box. Mounting clips (CC-MCL) are included for use every 18 inches. May be ordered with a Slim Profile Channel Junction Box (C-1RE-JBOX), sold separately.

### Specifications


COLOR . . . . .	White Lens
BODY FINISH . . . . .	Satin Nickel
WATTAGE . . . . .	15W
DIMMER . . . . .	Low Voltage Electronic
DIMENSIONS . . . . .	36"L x 0.9"W x 1.46"H
INTEGRATED LED MODULE . . . . .	3 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . .	50000 hours
COLOR RENDERING . . . . .	95 CRI
LAMP COLOR . . . . .	2700K Warm Dim
LUMENS/WATT . . . . .	197.40
LUMINOUS FLUX . . . . .	987 lumens



Shown in satin nickel / white lens

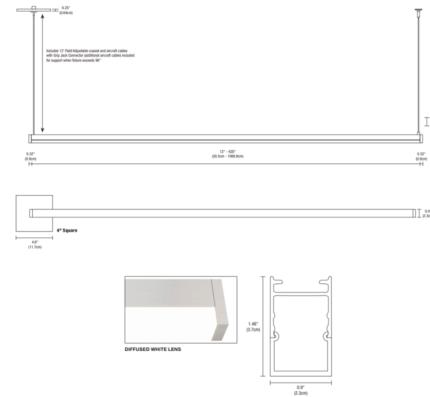

CLICK TO VIEW PRODUCT

Notes: