

# Lightology

lightology.com  
866-954-4489  
06-04-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG827071**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus Ceiling S1 Lens Warm Dim Downlight w/ Remote Power By PureEdge Lighting



### Description

Cirrus Ceiling Channel S1 Lens Warm Dim Downlight with Remote Power is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 12 to 240 inches, features a square lens with 105 degree beam, 5 LED watts per foot, and Warm Dim 2700K-2000K (27D) or 3000K-2000K (30D) color temperature. Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of incandescent and halogen light sources. Includes a 4.6 inch square canopy that mounts on a standard junction box. May be ordered with a Slim Profile Channel Junction Box (C-1RE-JBOX), sold separately. Mounting clips (CC-MCL) are included for use every 18 inches. Lengths over 96 inches ship as two segments. Maximum shipping length for Chrome finish is 84 inches. Product is built to order. Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (50 Watt Non-IC 24 Volt DC Power Supply) which fits inside junction box, or from a remote Universal (UNI) power supply feeding 24VDC up to 100 watts at a maximum of 40 feet away. Required power supply, dimmer control, and optional mounting accessories, sold separately. Note: Limited quantities available in Bronze finish.

### Specifications


COLOR	N/A
BODY FINISH	Satin Nickel
WATTAGE	5W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"L x 0.9"W x 0.9"H
INTEGRATED LED MODULE	1 x LED/5W/24V LED

### Technical Information

COLOR RENDERING	95 CRI
LAMP COLOR	2700K Warm Dim
LUMENS/WATT	63.20
LUMINOUS FLUX	316 lumens



Shown in satin nickel

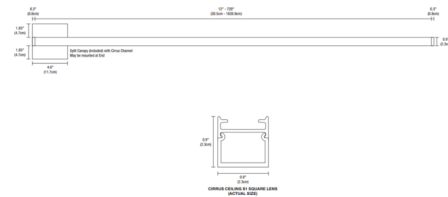

CLICK TO VIEW PRODUCT

Notes: