



Urbai 3.5IN 0-10V Dim New Construction Airtight Housing
SPEC #


CLT852244




BRAND Contrast Lighting

DESCRIPTION

The Urbai 3.5 Inch 120 Volt New Construction Airtight Housing is available in a Performance 1 and Performance 2 option. Performance 1 (IC - 10 watts/up to 1018 lumens) or Performance 2 (Non-IC - 15 watts/up to 1326 lumens). IC designation allows for insulation to be in direct contact with housing. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Cutout diameter: 4.25 inch. Can fit ceilings up to 2 inches thick. Requires a 6 inch clearance beyond ceiling. UL listed for damp locations. Wet location listed with shower trims only. JA8 listed with specific trims. Dimmable with a 0-10V dimmer (see attached manufacturer reference for dimmer compatibility). A complete fixture includes a housing and trim, sold separately.

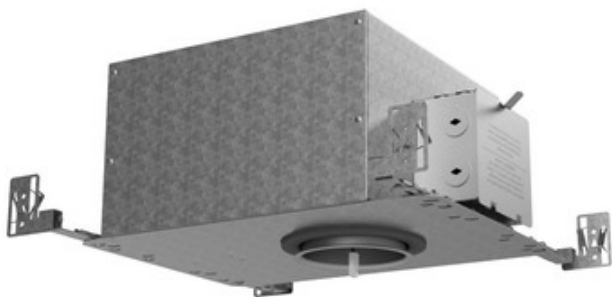

TRIM COLOR	N/A
BODY FINISH	Galvanized Steel
WATTAGE	10W
DIMMER	0-10V
DIMENSIONS	15.38"W x 6"H x 10"D
BULB NOT INCLUDED	
LAMP	LED/10W/120V LED
Technical Information	
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	6"
SPEC #	CLT852244

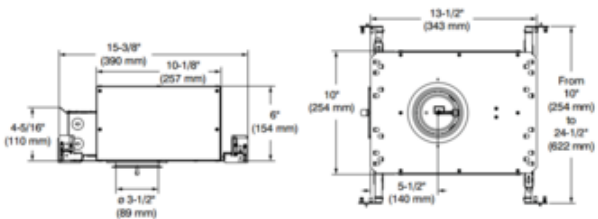

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE