

Lightology

lightology.com
866-954-4489
07-06-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **NOR866698**
Approved On: _____ Approved By: _____

NL Series 4IN 12V Non-IC New Construction Housing

By Nora Lighting



Description

The NL Series 4 Inch 12 Volt Non-IC New Construction Housing is constructed of one piece white baked enamel steel and allows for ceiling thickness up to 1.25 inch. Rated for use with a 12 volt MR16 GU5.3 lamp, sold separately. Non-IC housings require a minimum clearance of 3 inches from thermal insulation. UL listed. Suitable for damp locations (or wet locations with designated trims). Meets or exceeds ASTM-283 Air-Tight requirements. Dimmable with an (ELV) electronic low voltage or (MLV) magnetic low voltage dimmer (dependent on housing), sold separately. Note: A complete fixture includes a housing and trim, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR N/A
BODY FINISH White
WATTAGE 50W
DIMMER Low Voltage Magnetic
DIMENSIONS 9"W x 5.5"H x 6"D
BULB NOT INCLUDED 1 x MR16/GU5.3 (bipin)/50W/12V Halogen
OTHER BULB OPTIONS 1 x MR16/GU5.3 (bipin)/12V LED

Technical Information

APERTURE SIZE 4.000"
HOUSING HEIGHT 6"
HOUSING TYPE New Construction NON IC
CEILING TYPE Drywall with Trim



Shown in white

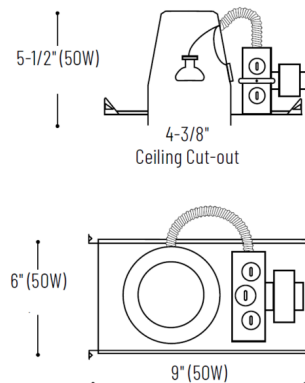

CLICK TO VIEW PRODUCT

Notes: