

# Lightology

lightology.com  
866-954-4489  
05-24-26

Project: \_\_\_\_\_

Company: \_\_\_\_\_

Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

SPEC #: **EDG880242**

Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Big-Shorty Uplight / Spotlight

By PureEdge Lighting



### Description

The BIG-Shorty Uplight/Spotlight yields BIG illumination in a shorty profile. The BIG-shorty offers an adjustable floor lamp that incorporates a 12 volt LED MR16 lamp. Adjustable up to 90 degrees. Finish in Satin Nickel, Black or White. Features an integral 12 volt plug-in LED driver with soft start short circuit and overload protection. Class 2, 10 watt max. Input: 120VAC, 0.6A 50/60Hz. Output: 12VAC, 0.08A Max. Dimmable with an electronic low voltage wall dimmer, sold separately. Note: On/off switch on plug. Hexcell louver, snoot and beam spreader film optical accessories sold separately. Available in Warm Dim 27D (2700K to 1800K) and 30D (3000K to 1800K) color temperature with Narrow Flood, Flood, or Wide Flood and Very Wide Flood (with lens film) beam spread options.

### Specifications


COLOR . . . . . N/A  
BODY FINISH . . . . . Black  
WATTAGE . . . . . 8W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 2.36"W x 4.5"H  
BULB INCLUDED . . . . . 1 x MR16/GU5.3 (bipin)/8W/12V LED

### Technical Information

BEAM ANGLE . . . . . 25°  
COLOR RENDERING . . . . . 97 CRI  
LAMP COLOR . . . . . 2700K Warm Dim  
LUMENS/WATT . . . . . 58.50  
LUMINOUS FLUX . . . . . 468 lumens



Shown in black

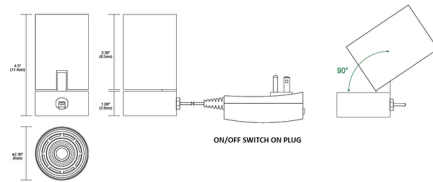

CLICK TO VIEW PRODUCT

Notes: