



### BRAND

Nora Lighting

### DESCRIPTION

The Cobalt 6 Inch New Construction Non-IC Housing is constructed of one piece aluminum and allows for adjustable ceiling thickness from .50 to 1.25 inch. Non-IC housings require a minimum clearance of 3 inches from thermal insulation. 120 volt input with 22 watt LED driver (1500 lumens) and 0-10V dimming option. UL listed for wet locations with designated trims. Energy Star. Meets or exceeds ASTM-283 Air-Tight requirements. Note: A complete fixture includes a housing and trim, sold separately.



Shown in: Aluminum


TRIM COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	22W
DIMMER	0-10V
DIMENSIONS	12.63"W x 7.5"H x 9"D
INTEGRATED LED MODULE	
LAMP	1 x LED/22W/120-277V LED

#### Technical Information

LUMINOUS FLUX	1500 lumens
LUMENS/WATT	68.18
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New Construction NON IC

SPEC #

NOR880798

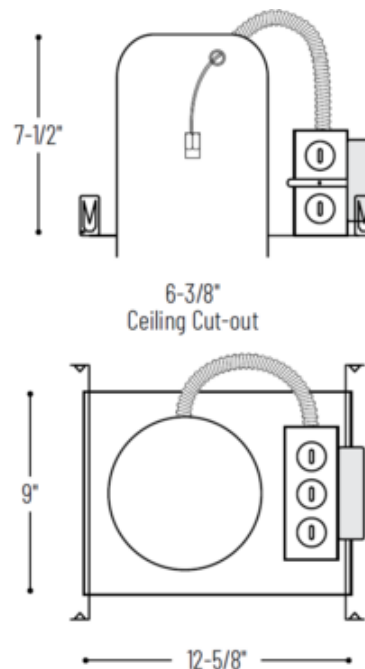

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE