

# Lightology

lightology.com  
866-954-4489  
04-22-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **NOR880798**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cobalt 6IN 1500 Lumen New Construction Non-IC Housing By Nora Lighting




### Description

The Cobalt 6 Inch New Construction Non-IC Housing is constructed of one piece aluminum and allows for adjustable ceiling thickness from .50 to 1.25 inch. Non-IC housings require a minimum clearance of 3 inches from thermal insulation. 120 volt input with 22 watt LED driver (1500 lumens) and 0-10V dimming option. UL listed for wet locations with designated trims. Energy Star. Meets or exceeds ASTM-283 Air-Tight requirements. Note: A complete fixture includes a housing and trim, sold separately.



Shown in aluminum

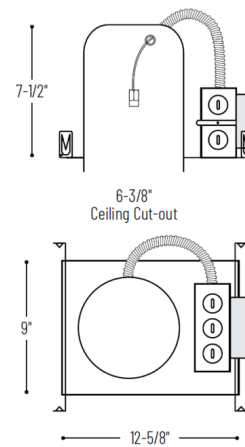

### Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	22W
DIMMER	0-10V
DIMENSIONS	12.63"W x 7.5"H x 9"D
INTEGRATED LED MODULE	1 x LED/22W/120-277V LED

### Technical Information

HOUSING HEIGHT	8"
HOUSING TYPE	New Construction NON IC
CEILING TYPE	Drywall with Trim
LUMENS/WATT	68.18
LUMINOUS FLUX	1500 lumens



CLICK TO VIEW PRODUCT

Notes: