

Lightology

lightology.com
866-954-4489
07-05-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **NOR880799**
Approved On: _____ Approved By: _____

Cobalt 6IN 1500 Lumen Remodel Non-IC Housing

By Nora Lighting



air
TIGHT

Description

The Cobalt 6 Inch Remodel Non-IC Housing is constructed of one piece aluminum and allows for adjustable ceiling thickness from .50 to 1.25 inch. Non-IC housings require a minimum clearance of 3 inches from thermal insulation. 120 volt input with 22 watt LED driver (1500 lumens) and 0-10V dimming option. UL listed. Suitable for wet locations with designated trims. Meets or exceeds ASTM-283 Air-Tight requirements. Note: A complete fixture includes a housing and trim, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	22W
DIMMER	0-10V
DIMENSIONS	15.75"W x 5.75"H x 6.75"D
INTEGRATED LED MODULE	1 x LED/22W/120V LED

Technical Information

HOUSING HEIGHT	6"
HOUSING TYPE	Remodel NON IC
CEILING TYPE	Drywall with Trim
LUMENS/WATT	68.18
LUMINOUS FLUX	1500 lumens



Shown in aluminum

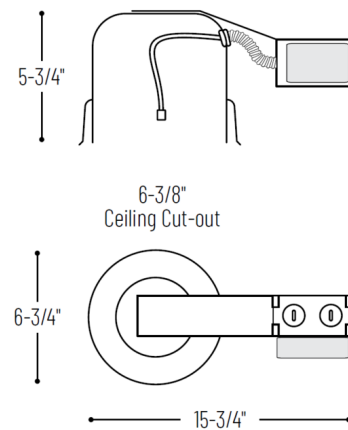

CLICK TO VIEW PRODUCT

Notes: