

# Lightology

lightology.com  
866-954-4489  
03-02-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **NOR882730**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## NL Series 4IN 120V IC Airtight New Construction Housing By Nora Lighting




### Description

The NL Series 4 Inch IC Airtight New Construction Housing is constructed of one piece white baked enamel steel and allows for adjustable ceiling thickness from 5/8 to 1.38 inch. Rated for use with a 120 volt MR16 GU10 lamp (housing includes MR16 GU10 with 40 degree beam spread). Non-IC housings require a minimum clearance of 3 inches from thermal insulation. UL listed. Suitable for damp locations (or wet locations with designated trims). Meets or exceeds ASTM-283 Air-Tight requirements. Dimmable with a standard incandescent dimmer, sold separately. Note: A complete fixture includes a housing and trim, sold separately.



Shown in white

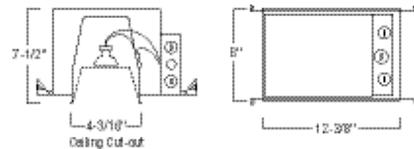

Cut-out: 4-3/8" Housing Length: 12-5/8"  
 ID: 4" Housing Width: 8"  
 Housing Height: 8"

### Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	50W
DIMMER	Standard 120V
DIMENSIONS	12.63"W x 7.5"H x 8"D
BULB INCLUDED	1 x MR16/GU10/50W/120V Halogen
OTHER BULB OPTIONS	1 x MR16/GU10/120V LED

### Technical Information

APERTURE SIZE	4.000"
HOUSING HEIGHT	8"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall with Trim



CLICK TO VIEW PRODUCT

Notes: