

Lightology

lightology.com
866-954-4489
09-14-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **NOR882730**
Approved On: _____ Approved By: _____

NL Series 4IN 120V IC Airtight New Construction Housing

By Nora Lighting




Description

The NL Series 4 Inch IC Airtight New Construction Housing is constructed of one piece white baked enamel steel and allows for adjustable ceiling thickness from 5/8 to 1.38 inch. Rated for use with a 120 volt MR16 GU10 lamp (housing includes MR16 GU10 with 40 degree beam spread). Non-IC housings require a minimum clearance of 3 inches from thermal insulation. UL listed. Suitable for damp locations (or wet locations with designated trims). Meets or exceeds ASTM-283 Air-Tight requirements. Dimmable with a standard incandescent dimmer, sold separately. Note: A complete fixture includes a housing and trim, sold separately.



Shown in white

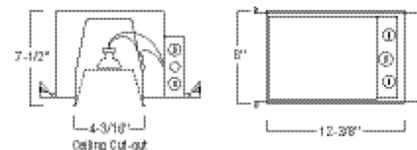

Cut-out: 4-3/8" Housing Length: 12-5/8"
ID: 4" Housing Width: 8"
Housing Height: 8"

Specifications

REFLECTOR/BAFFLE COLOR N/A
BODY FINISH White
WATTAGE 50W
DIMMER Standard 120V
DIMENSIONS 12.63"W x 7.5"H x 8"D
BULB INCLUDED 1 x MR16/GU10/50W/120V Halogen
OTHER BULB OPTIONS 1 x MR16/GU10/120V LED

Technical Information

APERTURE SIZE 4.000"
HOUSING HEIGHT 8"
HOUSING TYPE New construction IC Airtight
CEILING TYPE Drywall with Trim



CLICK TO VIEW PRODUCT

Notes: