


# Lightology

lightology.com  
866-954-4489  
05-12-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **AST882878**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## 3IN RD Trimless Adj Downlight / Housing with Remote Power By Astro Lighting



### Description

The 3 Inch Round Trimless LED Downlight and Non-IC Remodel Housing requires a remote power supply and is suitable for remodel and new construction applications. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Includes a 4.6 watt LED module in 2700K color temperature, 37 degree beam angle. 30 degree adjustable tilt. 360 degree rotation. 3 1/8 inch cutout. Recess depth: 5.91 inch. NOTE: Required LED driver sold separately. It is recommended using Astro Lighting's US website Driver Calculator Tool for determining recommended driver based on number of fixtures. Dimmer type dependent on driver selected.

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	4.6W
DIMMER	Dimmable
DIMENSIONS	3.11"W x 2.95"H
INTEGRATED LED MODULE	1 x LED/4.6W/120V LED
COUNTRY OF ORIGIN	China

### Technical Information

APERTURE SIZE	3.000"
APERTURE SHAPE	Round
HOUSING HEIGHT	3"
HOUSING TYPE	Remodel NON IC
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Adjustable Accent
BEAM ANGLE	37°
COLOR RENDERING	80 CRI
LAMP COLOR	2700K
LUMENS/WATT	114.78
LUMINOUS FLUX	528 lumens



Shown in white

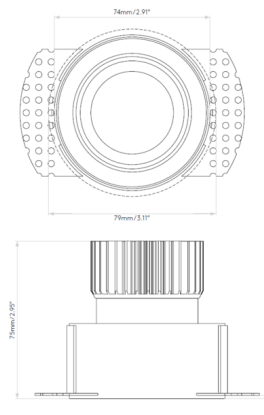

CLICK TO VIEW PRODUCT

Notes: