

# Lightology

lightology.com  
866-954-4489  
05-22-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG89129**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Cirrus Ceiling D1 Lens Downlight w/ Remote Power

By PureEdge Lighting



### Description

Cirrus Ceiling Channel D1 Lens Static White Downlight with Remote 24VDC Power is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 12 to 480 inches, features a 60 degree beam spread clear frosted or 100 degree beam spread diffused white lens, optional black or white louver, four wattage options, and a spectrum of color temperature options. Includes a 4 inch square canopy and mounting clips (C-MCL) for use every 24 inches. Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (50 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Note: Required power supply, dimmer control, and optional accessories sold separately.

### Specifications


COLOR . . . . . White Lens  
 BODY FINISH . . . . . Satin Nickel  
 WATTAGE . . . . . 5W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 12"L x 0.9"W x 0.9"H  
 INTEGRATED LED MODULE . . . . . 1 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 BEAM ANGLE . . . . . 100°  
 COLOR RENDERING . . . . . 95 CRI  
 LAMP COLOR . . . . . 2700K  
 LUMENS/WATT . . . . . 47.00  
 LUMINOUS FLUX . . . . . 235 lumens



Shown in satin nickel / white lens

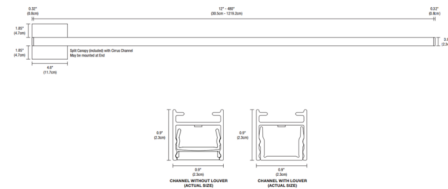

CLICK TO VIEW PRODUCT

Notes: