

Lightology

lightology.com
866-954-4489
02-11-26

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **EDG89129**
Approved On: _____ Approved By: _____

Cirrus Ceiling D1 Lens Downlight w/ Remote Power

By PureEdge Lighting




Description

Cirrus Ceiling Channel D1 Lens Static White Downlight with Remote 24VDC Power is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 12 to 480 inches, features a 60 degree beam spread clear frosted or 100 degree beam spread diffused white lens, optional black or white louver, four wattage options, and a spectrum of color temperature options. Includes a 4 inch square canopy and mounting clips (C-MCL) for use every 24 inches. Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (50 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Note: Required power supply, dimmer control, and optional accessories sold separately.



Shown in satin nickel / white lens

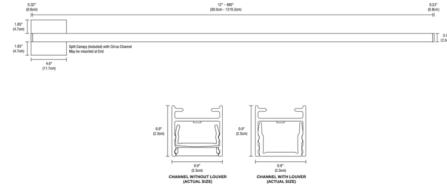

Specifications

COLOR	White Lens
BODY FINISH	Satin Nickel
WATTAGE	5W
DIMMER	Low Voltage Electronic
DIMENSIONS	12'L x 0.9'W x 0.9'H
INTEGRATED LED MODULE	1x LED/5W/24V LED

Technical Information

LAMP LIFE	50000 hours
BEAM ANGLE	100°
COLOR RENDERING	95 CRI
LAMP COLOR	2700K
LUMENS/WATT	47.00
LUMINOUS FLUX	235 lumens



CLICK TO VIEW PRODUCT

Notes: